

TOTO®

PEOPLE-FIRST INNOVATION™



washlet®

2015 FIT CHART

TOTO®

washlet®

COMPARISON CHART

WASHLET® COMPARISON CHART			S350e	S300e	B200	B100	C200	C100
			SW583 (round) SW584 (elongated)	SW573 (round) SW574 (elongated)	SW542 (elongated)	SW502 (elongated)	SW2043 (round) SW2044 (elongated)	SW2033 (round) SW2034 (elongated)
CLEANSE	COLOR: Cotton (#01), Sedona Beige (#12)		#01 / #12	#01 / #12	#01 / #12	#01 / #12	#01 / #12	#01 / #12
	REAR CLEANSE		●	●	●	●	●	●
	SOFT REAR CLEANSE		●	●	●	●	●	●
	FRONT CLEANSE		●	●	●	●	●	●
	WIDE FRONT CLEANSE		●	●				
	OSCILLATING CLEANSE		●	●	●	●	●	●
	PULSATING CLEANSE		●	●	●		●	
	INSTANTANEOUS WATER HEATING		●	●				
	WATER PRESSURE CONTROL		5 SETTINGS	5 SETTINGS	5 SETTINGS	5 SETTINGS	5 SETTINGS	5 SETTINGS
	WATER TEMPERATURE CONTROL		5 SETTINGS	5 SETTINGS	5 SETTINGS	3 SETTINGS	5 SETTINGS	3 SETTINGS
	WAND POSITION ADJUSTMENT		●	●	●	●	●	●
AIR	AIR PURIFIER (DEODORIZER)		●	●	●		●	●
	AIR DRYER		●	●	●		●	●
	AIR TEMPERATURE CONTROL		5 SETTINGS	5 SETTINGS	5 SETTINGS		5 SETTINGS	3 SETTINGS
SEAT	HEATED SEAT		●	●	●	●	●	●
	HEATED SEAT TEMPERATURE CONTROL		5 SETTINGS	5 SETTINGS	5 SETTINGS	3 SETTINGS	5 SETTINGS	3 SETTINGS
	SOFT CLOSE SEAT AND LID		●	●	●	●	●	●
SENSOR	SEAT SENSOR		●	●	●	●	●	●
	AUTOMATIC OPEN AND CLOSE LID		●					
	NIGHT LIGHT		●					
REMOTE CONTROL	REMOTE CONTROL		●	●	●	SIDE PANEL	●	SIDE PANEL
	REMOTE CONTROLLED SEAT		●					
	REMOTE CONTROLLED FLUSH							
HYGIENE	REMOVABLE LID		●	●	●	●	●	●
			●	●				
	PREMIST™		●	●			●	●
	WAND CLEANING MODE		●	●	●	●	●	●
	SELF-CLEANING WAND		●	●	●	●	●	●
ENERGY SAVING	ENERGY-SAVE TIMER		3, 6, 9 HOURS	3, 6, 9 HOURS	3, 6, 9 HOURS	6, 9 HOURS		
	AUTO ENERGY SAVER		●	●	●	●	●	●
	ON / OFF BUTTON		●	●	●	●		
POWER RATING			120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz
RATED POWER USAGE			835W	835W	406W	313W	406W	406W
LENGTH OF POWER CORD			Maximum length 3.94 ft.	Maximum length 3.94 ft.	Maximum length 3.94 ft.	Maximum length 3.94 ft.	Maximum length 3.94 ft.	Maximum length 3.94 ft.
WASHLET	NOZZLE FLOW RATE	REAR	9.1 - 14.5 oz. / min.	9.1 - 14.5 oz. / min.	9.8 - 20.3 oz. / min.	9.8 - 20.3 oz. / min.	9.1 - 14.5 oz. / min.	9.1 - 14.5 oz. / min.
		SOFT	10.8 - 14.5 oz. / min.	10.8 - 14.5 oz. / min.	9.8 - 18.6 oz. / min.	9.8 - 18.6 oz. / min.	9.1 - 14.5 oz. / min.	9.1 - 14.5 oz. / min.
		FRONT	9.8 - 14.5 oz. / min.	9.8 - 14.5 oz. / min.	9.1 - 20.3 oz. / min.	9.1 - 18.6 oz. / min.	9.8 - 14.5 oz. / min.	9.8 - 14.5 oz. / min.
WATER TEMPERATURE			86°F - 104°F	86°F - 104°F	86°F - 104°F	95°F - 104°F	86°F - 104°F	95°F - 104°F
DRYER	AIR TEMPERATURE		95°F - 140°F	95°F - 140°F	104°F - 140°F	-	86°F - 140°F	86°F - 140°F
	CAPACITY OF AIR		10.24 ft3 / min.	10.24 ft3 / min.	9.54 ft3 / min.	-	9.54 ft3 / min.	9.54 ft3 / min.
HEATED SEAT	SURFACE TEMPERATURE		82° F - 97° F	82° F - 97° F	82° F - 97° F	82° F - 95° F	82° F - 97° F	82° F - 97° F
WATER SUPPLY PRESSURE			8 psi - 109 psi	8 psi - 109 psi	8 psi - 109 psi	8 psi - 109 psi	8 psi - 109 psi	8 psi - 109 psi
WATER SUPPLY TEMPERATURE			33°F to 95°F	33°F to 95°F	33°F to 95°F	33°F to 95°F	33°F to 95°F	33°F to 95°F
AMBIENT TEMPERATURE			33°F to 104°F	33°F to 104°F	33°F to 104°F	33°F to 104°F	33°F to 104°F	33°F to 104°F
SIZE	ROUND		15-5/16"W x 18-7/8"D x 3-15/16"H	15-5/16"W x 18-7/8"D x 3-15/16"H	-	-	15-3/8"W x 18-7/8"D x 7-3/8"H	18-13/16"W x 18-7/8"D x 7-3/8"H
		ELONGATED	15-5/16"W x 20-3/4"D x 3-15/16"H	15-5/16"W x 20-3/4"D x 3-15/16"H	15 15/16"W x 20 1/2"D x 6-3/4"H	18-7/8"W x 20 1/2"D x 6-3/4"H	15-3/8"W x 20-7/8"D x 7-3/8"H	18-13/16"W x 20-7/8"D x 7-3/8"H

TOTO® WASHLET COMPATIBILITY FOR TOTO TOILETS

	NAME	S300e/ S350	B100/ B150/B200	C100/C200
ONE-PIECE TOILETS	AMIS®/LEGATO®	●	●	●
	AQUIA 1-PC®	●	●	●
	CAROLINA® (I & II)	●	●	●
	CARLYLE® (I & II)	●	●	●
	ECO GUINEVERE ®/GUINEVERE ®	●	●	●
	ECO LLOYD®/LLOYD®	●	●	●
	PACIFICA®	●	●	●
	RYOHAN®	●	●	●
	ECO SOIREE®/SOIREE®	●	●	●
	SUPREME® (elongated)	●	●	●
	SUPREME® (round)	★		★
	ECO SUPREME® (elongated)	●	●	●
	ECO SUPREME® (round)	★		★
	SUPREME II®	●	●	●
	ULTIMATE® (elongated)	●	●	●
	ULTIMATE® (round)	★		★
	ULTRAMAX® (elongated)	●	●	●
	ULTRAMAX® (round)	★		★
	ECO ULTRAMAX® (elongated)	●	●	●
	ECO ULTRAMAX® (round)	★		★
	ULTRAMAX II®	●	●	●
	WILLINGHAM®	●	●	●
TWO-PIECE TOILETS	AQUIA (I, II, III)	●	●	●
	AQUA WALL-HUNG®	●	●	●
	CARROLLTON®	●	●	●
	CARUSOE® (elongated)	●	●	●
	CARUSOE® (round)	★		★
	ECO CLAYTON®	●	●	●
	ECO DARTMOUTH®	●	●	●
	DRAKE® (elongated)	●	●	●
	DRAKE® (round)	★		★
	ECO DRAKE® (elongated)	●	●	●
	ECO DRAKE® (round)	★		★
	DRAKE II®	●	●	●
	DRAKE II® 1G	●	●	●
	MARIS®	●	●	●
	MARIS WALLHUNG®	●	●	●
	MERCER®	●	●	●
	ECO NEXUS®/NEXUS®	●	●	●
	PACIFICA® *	●	●	●
	PROMENADE® (elongated)	●	●	●
	PROMENADE® (round)	★		★
	ECO PROMENADE® (elongated)	●	●	●
	ECO PROMENADE® (round)	★		★
	ROWAN® (elongated)	●	●	●
	ROWAN® (round)	★		★
	VESPIN® (I & II)	●	●	●
	ECO WHITNEY®/ WHITNEY®	●	●	●

● SW554/SW574/SW584 elongated
★ SW553/SW573/SW583 round

● SW502/ SW532/SW542 elongated


● SW2034/SW2044 elongated
★ SW2033/SW2043 round



WASHLET® *e*water⁺ S300e/S350e Fit Chart


What if my Toilet isn't a TOTO Toilet? Will the Washlet still fit?

On a standard Toilet with no curves between the seat and tank, all you need is 1-3/4 inches of room past the mounting bolts.

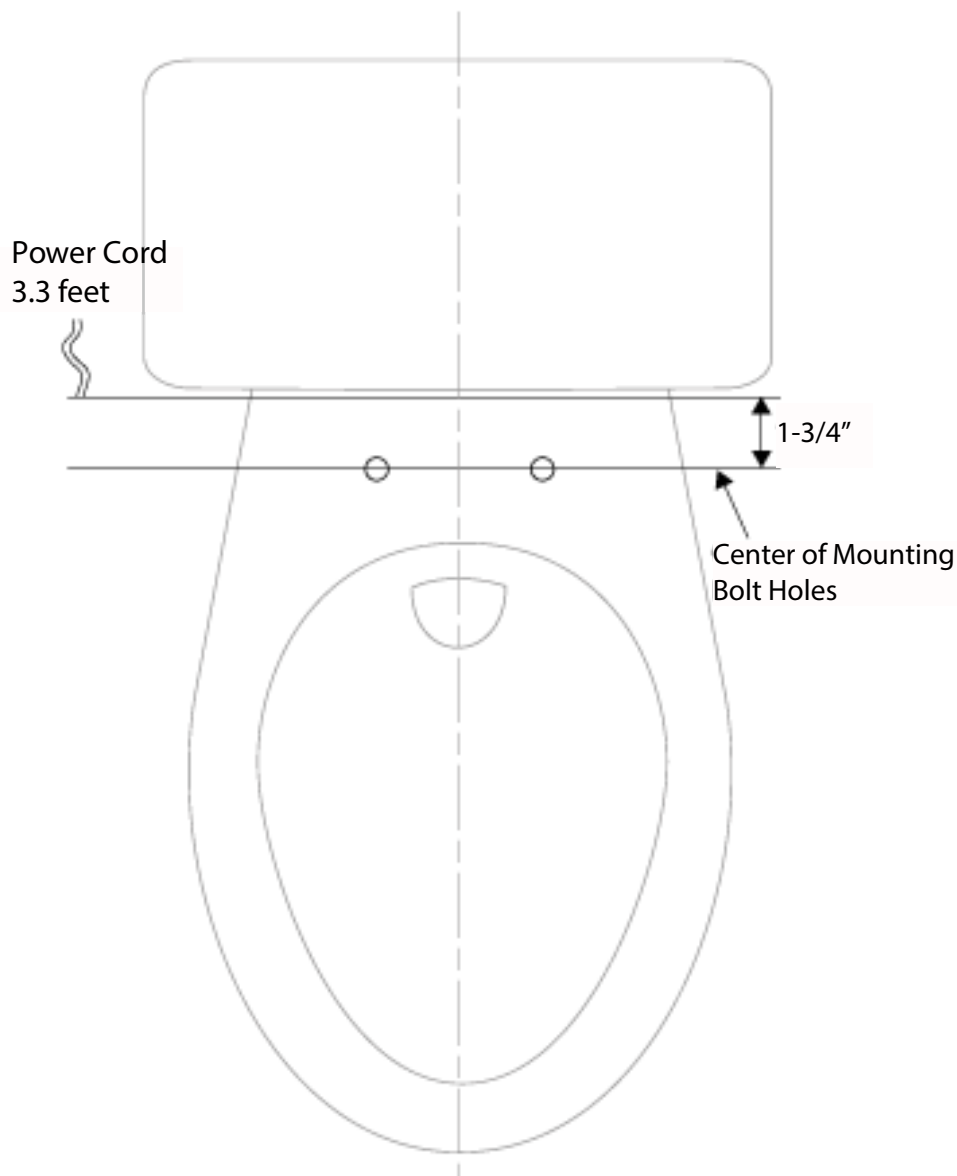




WASHLET® ewater⁺ S300e/S350e Fit Chart

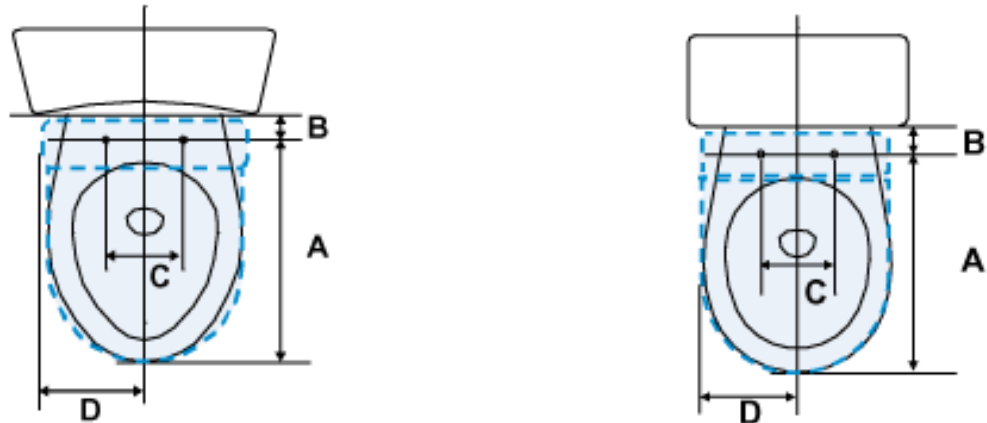

Note: Some styles of toilets may not allow the Washlet S300e/S350e to be installed due to certain contours near the tank and bowl area (see figures below). In the figure on the left side below, dimension D not allow enough open space to accommodate the minimum width of 9 inches.

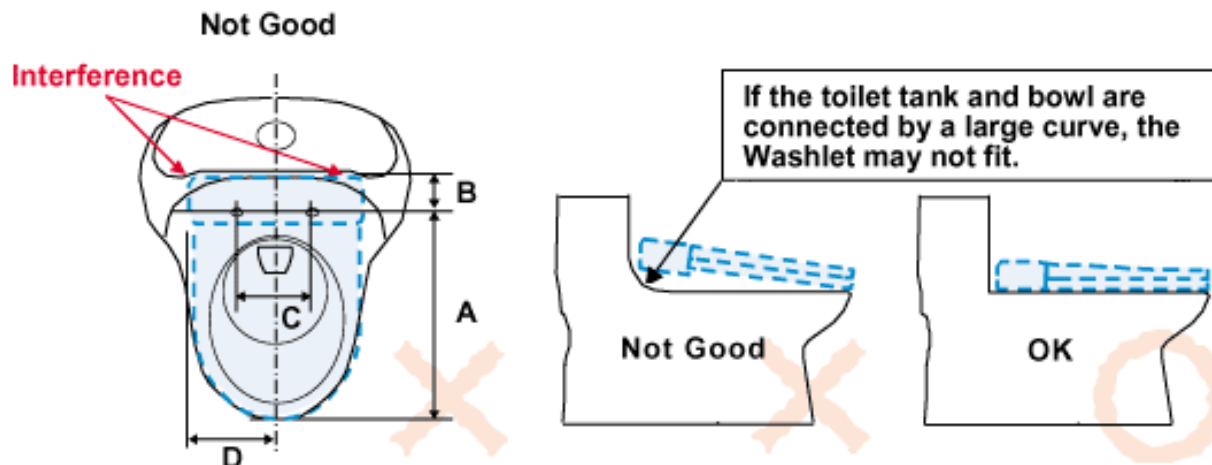


DIMENSIONS	DIMENSION REQUIREMENTS
A	Elongated - Approximately 18-1/2 inches (470 mm) Round - Approximately 16-1/2 inches (420 mm)
B	Minimum of 1-3/4 inches (45 mm) from front most face of tank to the center of mounting bolt holes
C	Approximately 5-1/2 inches (140 mm)
D	Minimum 9 inches (210 mm) of open space from center of Washlet S300e/S350e (or toilet to edge of Washlet S300e/S350e and flat bowl surface.

WASHLET® C200 Fit Chart





What if my Toilet isn't a TOTO Toilet? Will the Washlet still fit?


On a standard Toilet with no curves between the seat and tank, all you need is two inches of room past the mounting bolts.

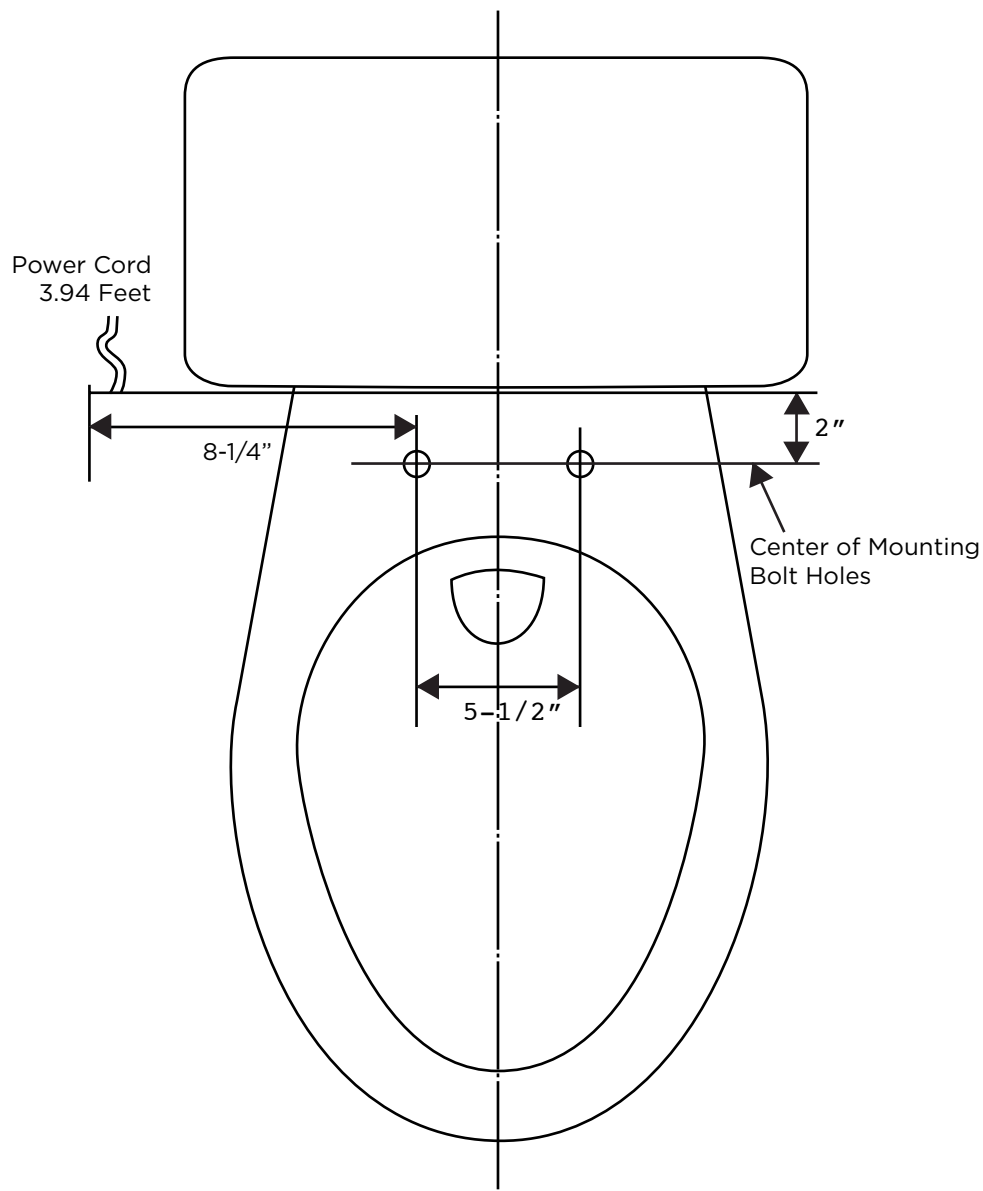

WASHLET® C200 Fit Chart

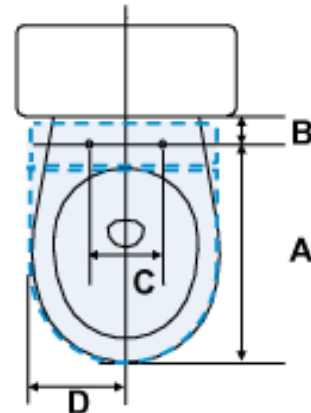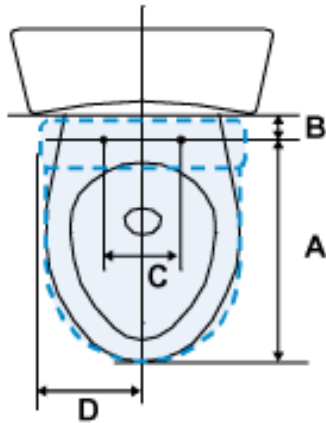

Note: Some styles of toilets may not allow the Washlet C200 to be installed due to certain contours near the tank and bowl area (see figures below). In the figure on the left side below, dimension D not allow enough open space to accommodate the minimum width of 9 inches.

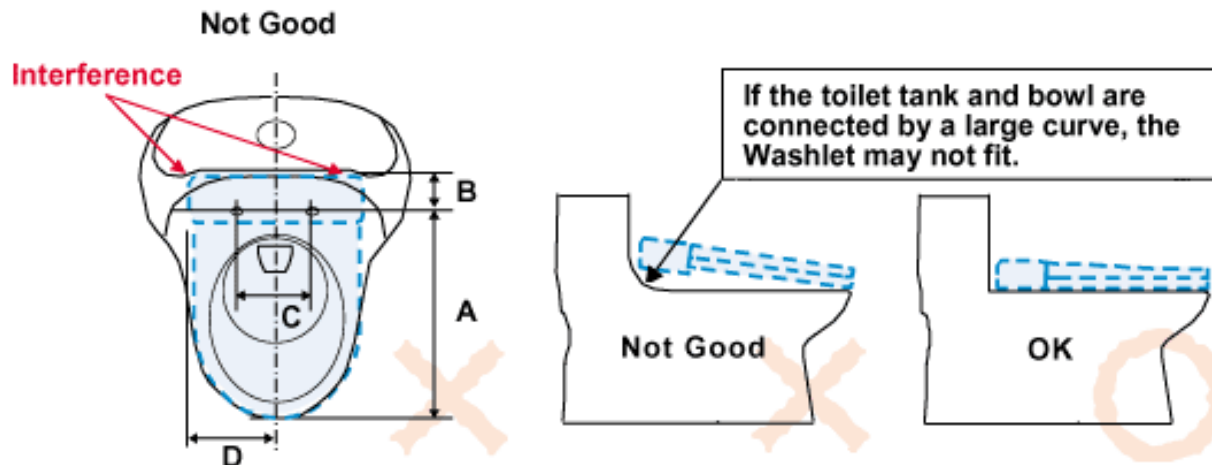


DIMENSIONS	DIMENSION REQUIREMENTS
A	Elongated - Approximately 20-7/8 inches (531 mm) Round - Approximately 18-7/8 inches (480 mm)
B	Minimum of 2 inches (50 mm) from front most face of tank to the center of mounting bolt holes
C	Approximately 5-1/2 inches (140 mm)
D	Minimum 9 inches (210 mm) of open space from center of Washlet C200 (or toilet to edge of Washlet C200 and flat bowl surface.



WASHLET® C100 Fit Chart



What if my Toilet isn't a TOTO Toilet? Will the Washlet still fit?

On a standard Toilet with no curves between the seat and tank, all you need is 2 inches of room past the mounting bolts.

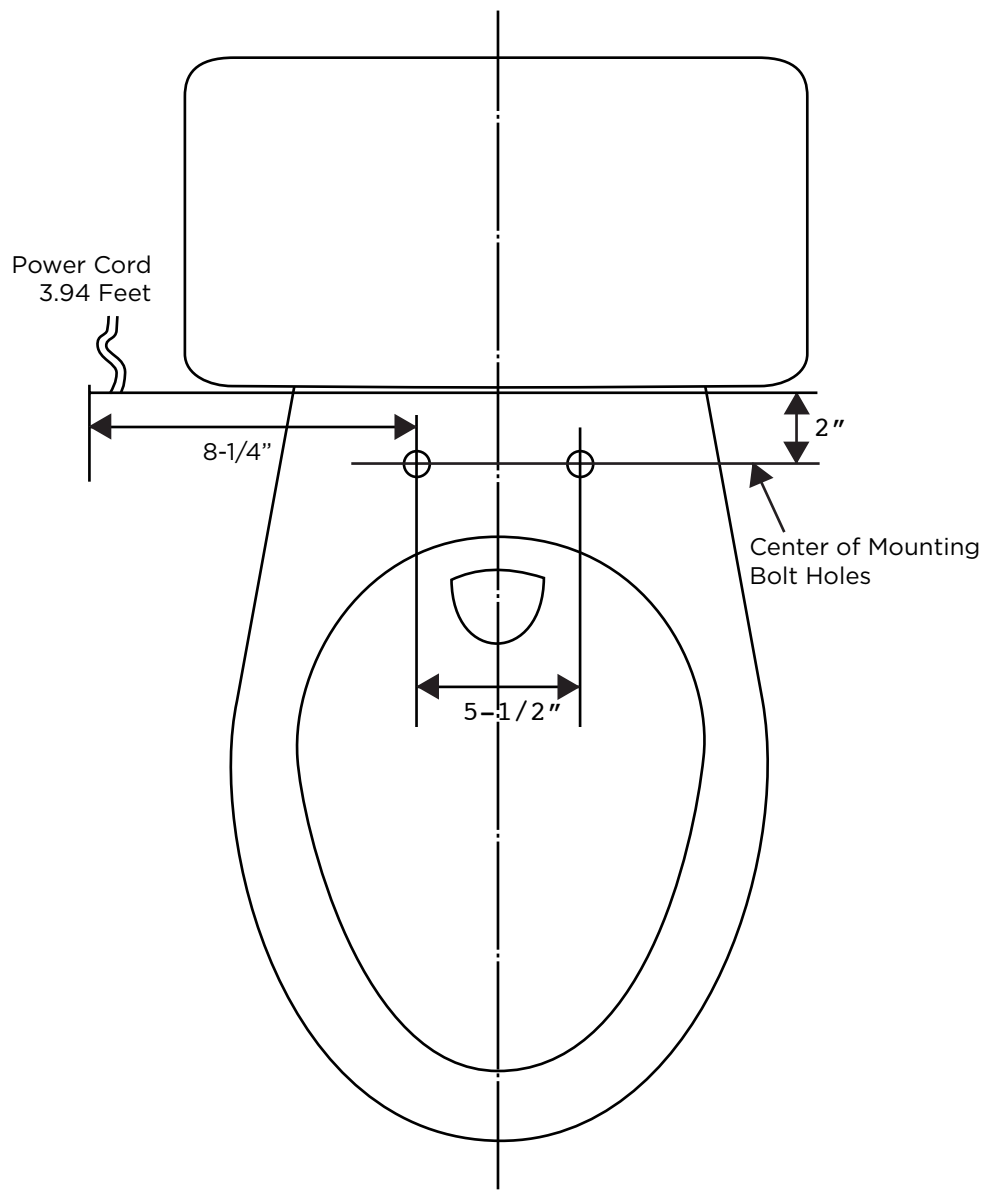




WASHLET® C100 Fit Chart

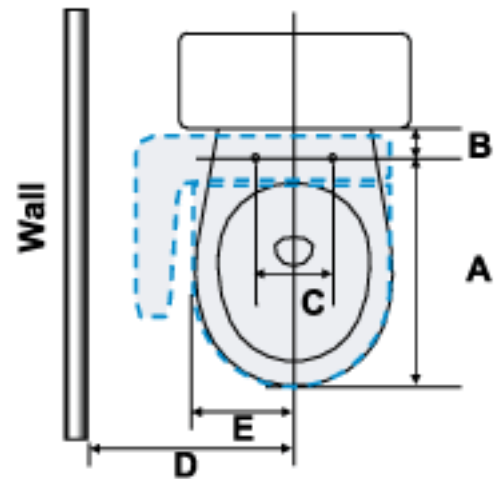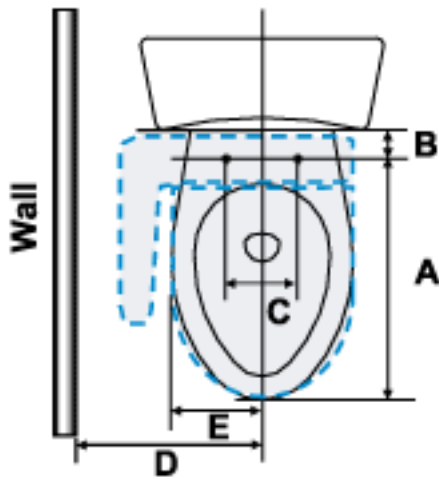

Note: Some styles of toilets may not allow the Washlet C100 to be installed due to certain contours near the tank and bowl area (see figures below). In the figure on the left side below, dimension D not allow enough open space to accommodate the minimum width of 11 inches.

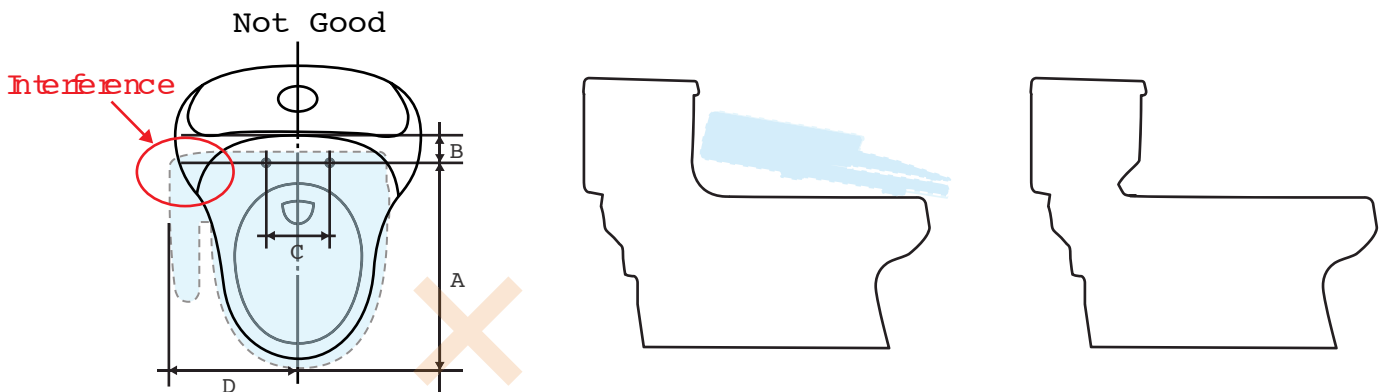


DIMENSIONS	DIMENSION REQUIREMENTS
A	Elongated - Approximately 20-7/8 inches (531 mm) Round - Approximately 18 7/8 inches (480 mm)
B	Minimum of 2 inches (50 mm) from front most face of tank to the center of mounting bolt holes
C	Approximately 5-1/2 inches (140 mm)
D	Minimum 11 inches (277 mm) of open space from center of Washlet C100
E	Maximum 8-3/8 inches (213 mm) from center to edge of bowl surface

WASHLET® B100 Fit Chart




What if my Toilet isn't a TOTO Toilet? Will the Washlet still fit?


On a standard Toilet with no curves between the set and tank, all you need is 2 inches of room past the mounting past the mounting bolts.

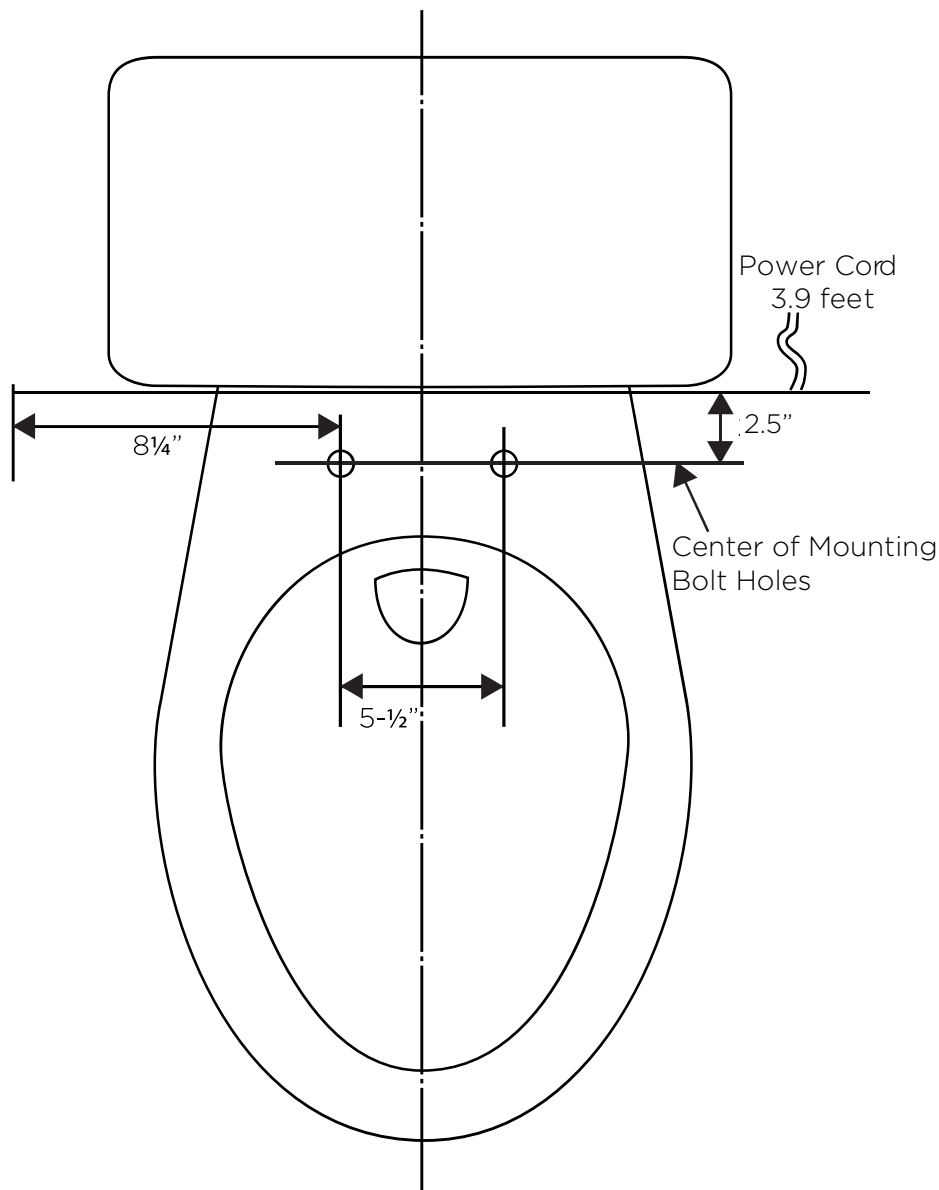

WASHLET® B100 Fit Chart

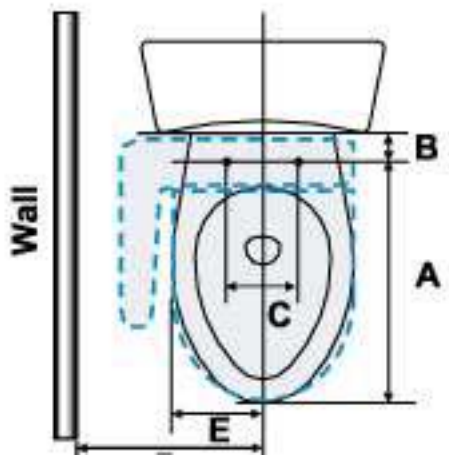

Note: Some styles of toilets may not allow the Washlet B100 to be installed due to certain contours near the tank and bowl area (see figures below). In the figure on the left side below, dimension D not allow enough open space to accommodate the minimum width of 11 inches.

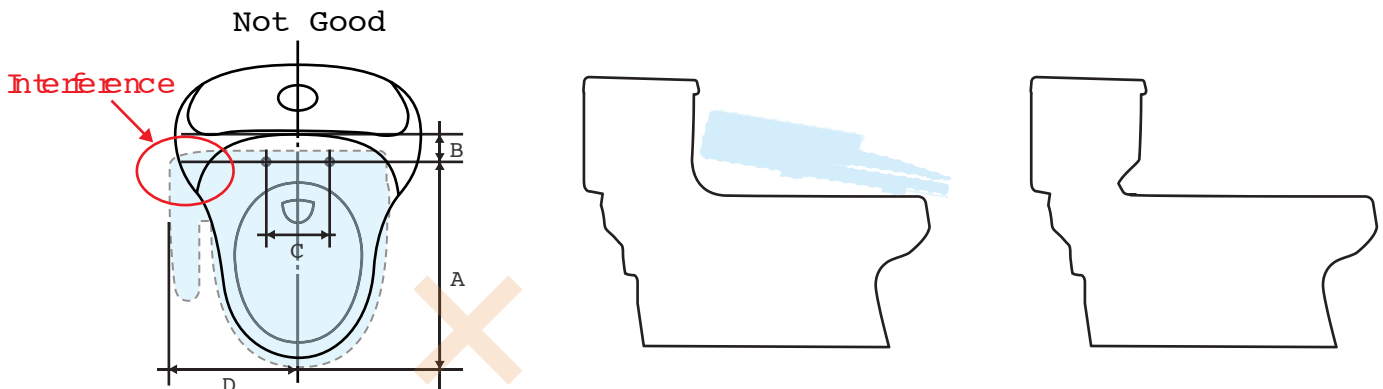


DIMENSIONS	DIMENSION REQUIREMENTS
A	Elongated - Approximately 19-1/8 inches (485 mm)
B	Minimum of 2 inches (51 mm) from front most face of tank to the center of mounting bolt holes
C	Approximately 5-1/2 inches (140 mm)
D	Minimum 11 inches (278 mm) of open space from center of Washlet B100
E	Maximum 8-3/8 inches (213 mm) from center to edge of bowl surface

WASHLET® B150/B200 Fit Chart




What if my Toilet isn't a TOTO Toilet? Will the Washlet still fit?


On a standard Toilet with no curves between the set and tank, all you need is 2.5 inches of room past the mounting past the mounting bolts.

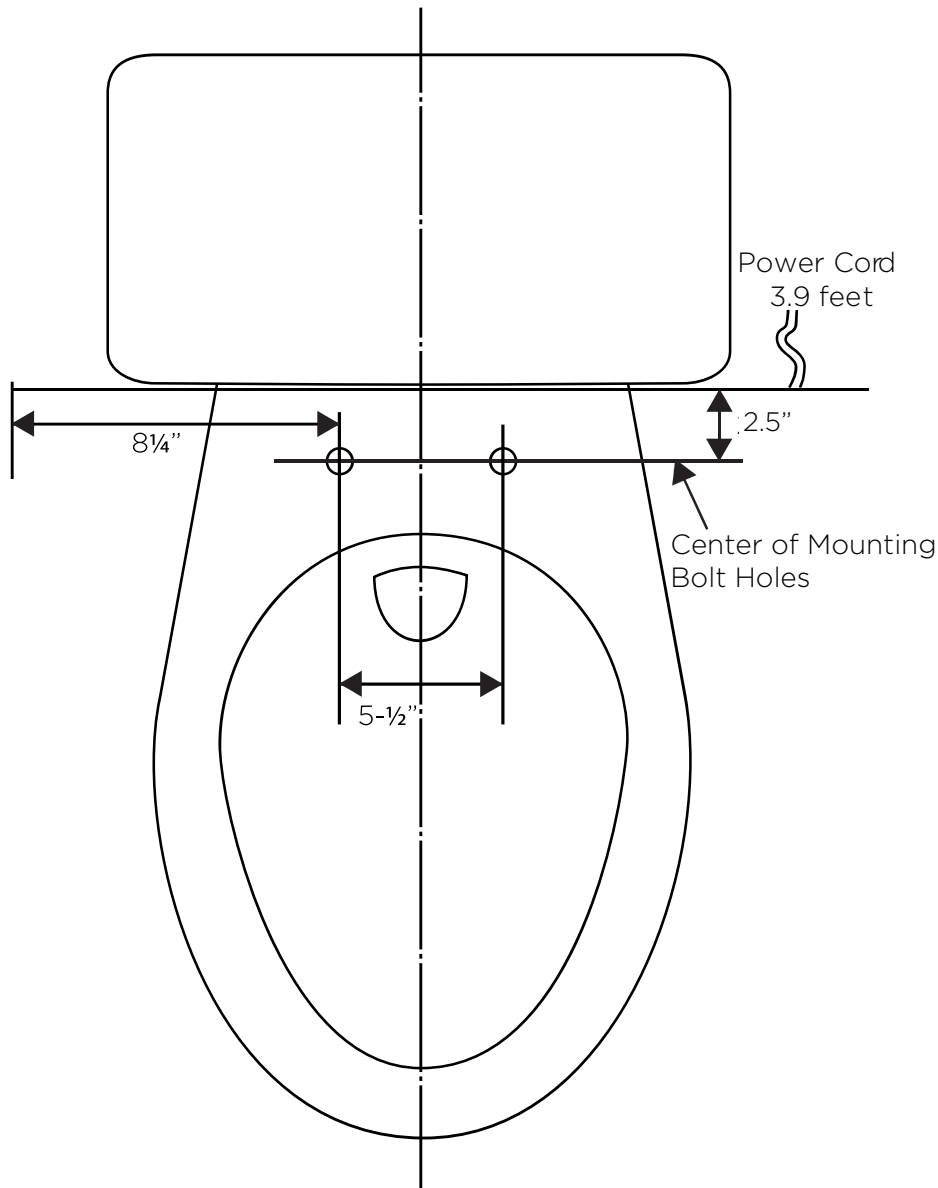

WASHLET® B150/B200 Fit Chart

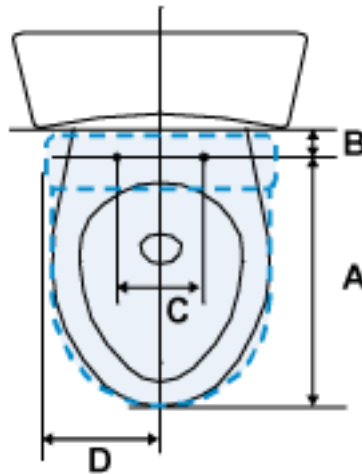

Note: Some styles of toilets may not allow the Washlet B150/B200 to be installed due to certain contours near the tank and bowl area (see figures below). In the figure on the left side below, dimension D not allow enough open space to accommodate the minimum width of 11 inches.

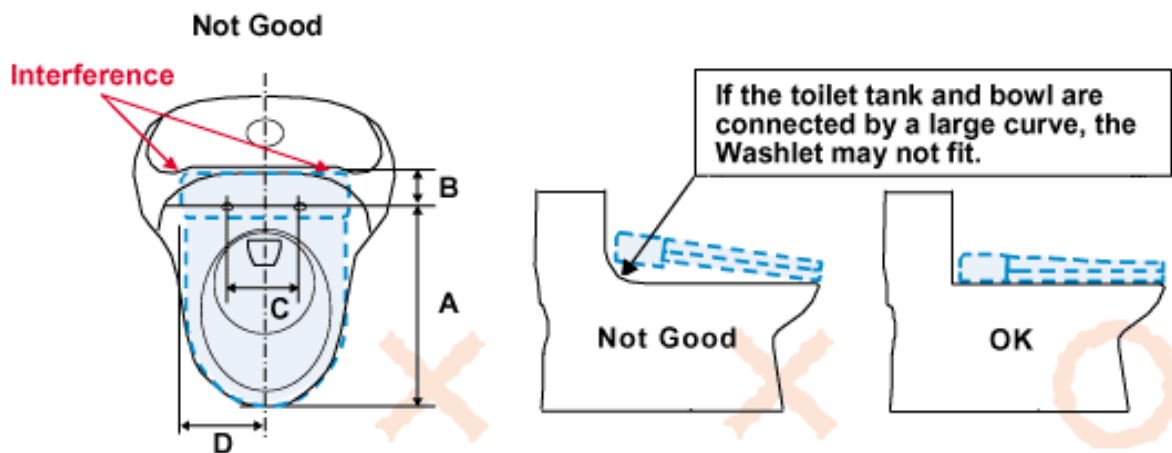

DIMENSIONS	DIMENSION REQUIREMENTS
A	Elongated - Approximately 18 5/8 inches (473mm)
B	Minimum of 2 1/2 inches (64mm) from front most face of tank to the center of mounting bolt holes
C	Approximately 5-1/2 inches (140 mm)
D	Minimum 9 inches (210 mm) of open space from center of Washlet B150/B200 (or toilet to edge of Washlet B150/B200 and flat bowl surface.