

Available Q3

PRELIMINARY

JID4436ES

JENN-AIR® 36" INDUCTION DOWNDRAFT COOKTOP



SIGNATURE FEATURES

Downdraft Ventilation – developed and refined by Jenn-Air – captures smoke, steam and odors at the cooking surface, whisking them down and out of the kitchen before they can escape.

Induction Technology cooks like gas, looks like electric, and outperforms both. By converting cookware into the heat source, induction technology offers fast, efficient and outstanding cooking power.

Optional Duct-Free Filter Kit (not included) efficiently captures smoke, grease and moisture, resulting in a consistently fresh kitchen with an inviting, open design without requiring ducting.

SPECIFICATIONS

- Induction Technology
- Downdraft Ventilation
- 350 CFM Blower Capacity
- Convertible to Duct-Free Ventilation
- Flexible Induction Elements
- Induction Bridge Element
- Electronic Touch Controls
- Pan Detection
- Performance Boost
- Keep Warm™ Function
- Element Timers
- Hot Surface Indicators
- Control Lock
- 2 Fan Speed Settings
- Timer Function
- Ceramic Glass Surface
- LED Ambient Lighting
- Quiet Operation

STYLE OPTIONS

Euro-Style Stainless design includes black glass cooktop with stainless steel accents – JID4436ES

OPTIONAL ACCESSORIES

Duct-Free Filter Kit – W10807915

Replacement Charcoal Filter – W10807916



LIMITED
WARRANTY


JENN-AIR®

JID4436ES


IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

PRODUCT DIMENSIONS

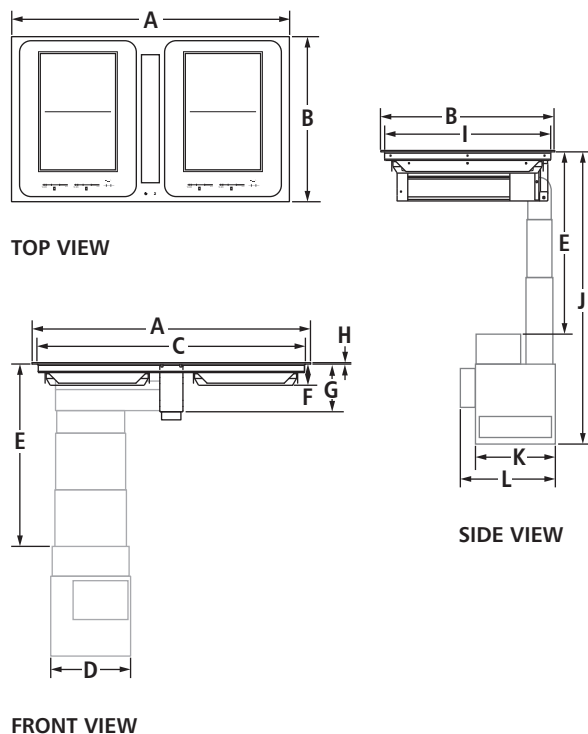

OPENING/CLEARANCE DIMENSIONS

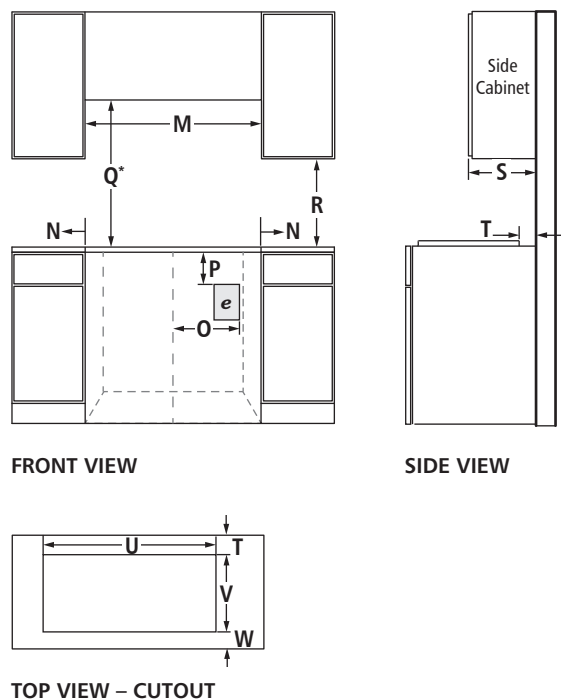

MODEL #		JID4436ES	
		in	cm
PRODUCT DIMENSIONS			
A	Overall width	36	91.4
B	Overall depth	21 ¹¹ / ₃₂	54.2
C	Width of recessed cooktop	34 ⁹ / ₁₆	87.8
D	Width of blower motor assembly	11 ¹ / ₈	28.2
E	Height from blower housing assembly to countertop (min.-max.)	14 ⁹ / ₁₆ - 21 ¹ / ₄	37.0 54.0
F	Height of recessed cooktop	2 ⁹ / ₁₆	6.5
G	Height from electrical housing to countertop	7 ⁹ / ₁₆	19.2
H	Height of cooking surface	⁵ / ₆₄	0.2
I	Depth of recessed cooktop	20 ⁹ / ₃₂	51.5
J	Height from bottom of blower housing assembly to countertop (min.-max.)	29 ¹³ / ₁₆ - 36 ¹ / ₂	75.7- 92.7
K	Depth of blower housing assembly	11 ¹ / ₁₆	28.1
L	Depth of blower housing assembly with electrical box	13 ⁷ / ₈	35.2

OPENING/CLEARANCE DIMENSIONS

M	Width of combustible area above cooking surface (min.)	36	91.4
N	Width from cooktop to fixed wall or other combustible material (min.)	2 ¹ / ₂	6.4
O	Width to outer edge of outlet from centerline of cabinet (max.)	24	61.0
P	Height to top edge of outlet (min.)	12	30.5
Q*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.3
R	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
S	Depth of upper cabinet (recommended)	13	33.0
T	Depth from cutout to wall (min.)	1 ¹ / ₂	3.8
U	Width of cutout (recommended)	35 ⁷ / ₁₆	90.0
V	Depth of cutout (recommended)	20 ⁷ / ₈	53.0
W	Depth from cutout to front of countertop	2 ¹¹ / ₁₆	6.8
e	Recommended electrical access location		

*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.