

best[®]

Live Beautifully™



CATTURA™ DOWNDRAFT



BEST® opens up new possibilities in kitchen design
with the Cattura™ downdraft.

At the touch of a button the Cattura downdraft quickly rises to a height of 18" to handle serious cooking ventilation requirements and tall pots—even on the front burners.

POWERFUL, YET UP TO 35% QUIETER.
And in a word—beautiful.



BEST® engineers designed the Cattura downdraft to be up to 35% quieter than any other downdraft on the market. But they didn't stop with refining sound reduction. A powerful LED lightbar illuminates the entire cooking surface brilliantly, and a seamless touch control panel wipes clean in an instant. Filters simply lift out for easy cleaning in the dishwasher, and smooth stainless-steel surfaces clean up effortlessly. The Cattura downdraft will rise to meet every cooking challenge, and slip away to open up your kitchen space when it's not in use. And that's a beautiful idea from BEST.



Efficient LED lighting provides impressive cooktop illumination, even with pots and pans placed on the front burners.



The touch-control panel features easy-to-read icons. Its seamless design simply wipes clean.



The integral, self-closing cap hides the lowered downdraft completely, leaving your counter unobstructed.



Traditional gas or electric cooktops.



Drop-in gas rangetop.



Free standing or slide-in range.



Built-in oven with cooktop.

Realize design aspirations utilizing your favorite cooking appliances.

The Cattura downdraft from BEST frees you from constraints that previously limited your kitchen design options and appliance choices. For the first time, a downdraft can be installed with a free-standing range, drop-in rangetop, gas or electric cooktop, slide-in range or a built-in oven with a cooktop.

The unique design, with its graceful curves and sophisticated angles, visually complements any of today's premium cooking appliances. And with the use of a trim kit accessory, you can be assured of a custom appearance between the cooking appliance and the downdraft. This ensures you can choose the type of cooking appliance best suited for your design and cooking needs.

Unsurpassed design flexibility.

Nine ducting options open up your design possibilities.

Because the FlexBlower system enables multiple positioning options, you can install the blower under the floor, in a side or rear cabinet for installations that incorporate ovens, or to open up cabinet space under the cooking surface. That kind of flexibility opens up a whole new way to look at kitchen design.

Front Exhaust



Blower attached can rotate for left, right or downward discharge.



Duct transition in front of downdraft to blower installed below the floor line.

Side Exhaust*



In-cabinet blower placement, left or right side.



Transition through cabinet to blower installed below the floor line.

Rear Exhaust*



Remote transition behind downdraft to blower installed above or below the floor line.

Recirculation




Non-ducted recirculation kit can be located in the toe-kick space.

*Some FlexBlower applications may require deeper cabinets. Refer to Installation Instructions.

POWERFUL VENTILATION RIGHT WHEN YOU NEED IT.
OUT OF SIGHT WHEN YOU DON'T.

Designing a dream kitchen doesn't have to include compromises. With Cattura, the groundbreaking new downdraft from BEST, you can design confidently, knowing it will pair with a broad range of cooktop appliances— aesthetically and mechanically—in virtually any installation. Designed for serious cooking, Cattura captures cooking

effluents better than any other downdraft on the market. But the quest for greater capture doesn't compromise another special feature—quiet performance. In fact, the Cattura downdraft moves air more quietly than any downdraft. Power when you need it, and open lines of sight across the kitchen when you don't. Why compromise your design?

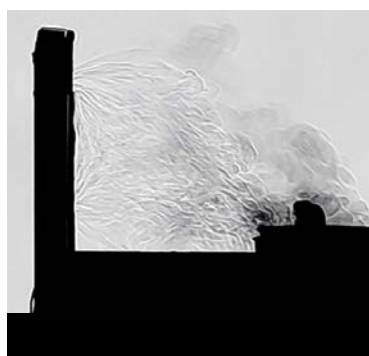

It's the most effective downdraft.
And BEST can prove it.

With patent pending VERTEX™ Complete Capture Design, the dual inlet ports on the face of the downdraft and across the arched top enable ventilation performance that rivals the finest island hoods. Shadowgraph imaging depicts the capture in vivid detail. Here, heat, steam and smoke are clearly shown being drawn into the front and top inlets.



VERTEX™ Complete Capture Design technology ventilates as well as an island hood.

Up to 35% quieter operation than any other downdraft.

Chimney raises 18" off the counter surface for optimal capture on all burners.

Long-lasting LED lighting technology means lamps may never need replacement.

Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

10-minute time-delay shut-off feature and reminder light for filter maintenance.

Remote control to activate downdraft from another location.

Works with optional Automatic Make-Up Air Dampers.

Model Numbers:

D49M30SB

D49M36SB

D49M48SB



Our VERTEX™ Complete Capture Design technology performs as well as an island hood.



An LED light bar evenly illuminates the entire cooking surface.



A touch of a button raises or lowers the 18" downdraft.



Sleek, easy-to-clean touch-control panel.



An optional remote control button raises or lowers the downdraft as needed.

Hood Sizes

Widths 30", 36", 48"

Depth 2-1/4"

Finish

Stocked Brushed Stainless Steel
Special Order Not Available

Features

Lighting Type	LED, 7W (30"); 14W (36"); 18W (48")
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	4-speed Capacitive Glass
Control Features	Heat Sentry™, Delay Off, Filter Timer
Remote Control	Optional ACRD
Filter Type	Mesh Grease Filter
Non-ducted Capability	Yes

Hood Blower Options (Must choose one blower sold separately)


Internal	PF6			
FlexBlower CFM	600			
Sones	8.8			
External In-Line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500
Sone levels are typically half of comparable CFM internal blowers.				

Accessories

Non-ducted Recirculating Kit	ANKD
Transition to 8" Round	AVDKD8
Transition to 10" Round	AVDKD10
Charcoal Filter	AFCF
Range Trim Kit	ATKD30SB, ATKD36SB, ATKD48SB
Automatic MUA Damper	MD6T, MD8T, MD10T (Requires Fresh Air Inlet)
Fresh Air Inlet	641FA, 643FA, 610FA

Installation Requirements

Amps @ 120V: Internal Blower	6.0 Max
Electrical	Plug In
Duct Size: Internal Blower	8"
Duct Size: External Blower	10" at hood
Duct Direction	Front, Left, Right, Rear or Down
Backdraft Damper	Not Included

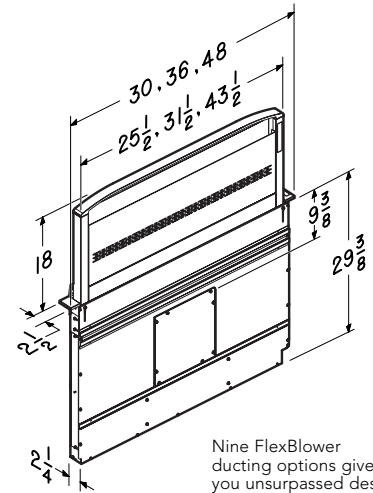


Nine FlexBlower ducting options give you unsurpassed design flexibility. The FlexBlower can be installed in front, to the left, right or rear of the downdraft.



best

BESTRangeHoods.com

926 West State Street, Hartford, Wisconsin 53027
In U.S.A. 800-558-1711, In Canada 866-737-7770



0 26715 23501 8