



Corporate Office & Showroom
 1295 N Opdyke Road
 Auburn Hills MI 48326
 248.377.2300 / 800.482.1948

Cleveland Office & Showroom
 12610 Corporate Drive
 Cleveland OH 44130
 216.362.9200 / 800.362.2807

www.trevarrowinc.com



FORTE SERIES CHIMNEY WALL HOOD — 300 CFM RETAIL PROMOTION PROGRAM

Effective Dates: January 1, 2019 through May 31, 2019
 Scope: All dealer with account in good standing.
 Purpose: Promote the Forte 300CFM option added to the Best product line in 2018.

Forte WTT32I3 300 CFM Stainless Steel Chimney Wall Hoods

The Forte (pronounced “four-tay”) is available in three widths: 30”, 36”, and 42”.

This newest addition to the Forte Series includes a powerful 300 CFM internal blower for a no worries “out-of-the-box” solution for your ventilation needs. And now for a limited time it offers a savings solution for you and your customers’.



Purchase any of the Forte WTT32I3 Series Hoods listed prior to May 31, 2019

*you receive a \$75 SPA**

your customer receives the retail promotion price below

<u>Models</u>	<u>Width</u>	<u>Depth</u>	<u>List Price</u>	<u>Retail Promotion</u>
WTT32I330SB	30”	22”	\$1,020	\$749
WTT32I336SB	36”	22”	\$1,078	\$799
WTT32I342SB	42”	22”	\$1,236	\$949



*To qualify for the discount the product must be ordered and shipped prior to May 31, 2019.

Forte WTT32I3

300 CFM Stainless Steel
Chimney Wall Hood

HVI certified performance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

5 minute delay-off feature and reminder light for filter maintenance

Telescopic flue for 8–9' ceilings is standard; flue extensions for 10' ceilings and custom extensions available

Recirculating flues have vent openings to allow non-ducted operation and may be exposed in ducted applications with 9' ceilings



Hood Sizes

Width 30": WTT32I330SB, **36"**: WTT32I336SB, **42"**: WTT32I342SB

Depth 22" (all widths)

Finish

Stocked	Brushed Standard Grade Stainless Steel
Special Order	Not Available

Features

Light Type	Halogen 50W, GU10
Number of Lamps	2 (30", 36"); 3 (42")
Lighting Levels	3
Lighting Lamps Included	Yes
Control Type	4-Speed, Electronic Push-button
Control Features	Heat Sentry™
Control Remote	No
Filter	Stainless Steel Mesh
Filter Options	None Available
Non-ducted Capability	Yes

Blower

Internal CFM	Single; 300 CFM
Sones at Normal	0.8





Accessories

10' Flue Extension (Ducted or Non-ducted)	AEWTT32SB
Non-Duct Recirculating Kit	ANKWTT320 for 30"; ANKWTT326 for 36" & 42"
Decorative Trim	Not available

Installation Requirements

Amps @ 120V	1.7 (30", 36"), 2.0 (42")
Electrical	Plug-in
Duct Size	Internal 300 CFM Blower: 8" Round
Duct Direction	Vertical
Backdraft Damper	Included

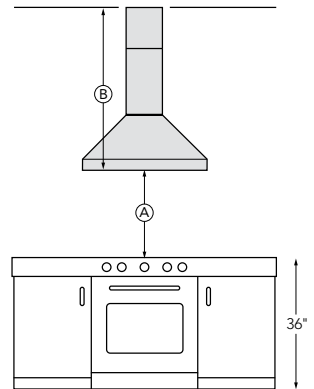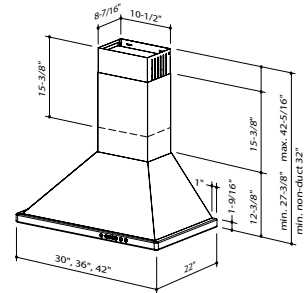

A. Installation height above the cooking surface 24–30"

B. Minimum/maximum distance from bottom of range hood to top of telescopic flue : 27-3/8" – 42-5/16"



4-Speed Electronic push-button control provides full range of operation



Quick-release stainless steel filter is dishwasher safe



BESTRANGEHOODS.COM, IN U.S.A. 800-558-1711, IN CANADA 866-737-7770

Best is a registered trademark of Broan. Best® reserves the right to change specifications at any time without notice. ©2018 Broan | Printed in USA | 01/18 | 99851002A