




Instant Hot Water Dispensers

Digital Instant Hot Water Tank

Stainless Steel Tank dispenses near boiling 205°F filtered hot water instantly.

Water dispenser sold separately.

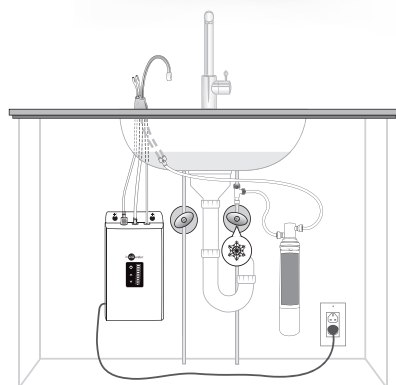

Submittal Sheet

2/3 gal stainless steel tank

Easy to adjust digital temperature control from 190°F - 210°F

Maintains the precise temperature setting $\pm 0.9^\circ\text{F}$

Tool-free tank connections and dry start protection to ease installation

Rapid recovery 115V, 1300 watts, 11.3A

For use with InSinkErator instant hot water faucets and filtration systems

Unit not for commercial/industrial use

Models: HWT300 - Digital tank only
HWT300-F2000S - Digital tank with F2000S filtration system

*We Come To You In-Home Limited Warranty covers parts and labor**

Tank: 4-years

Filtration System: 1-year


(excluding replaceable filter cartridge)

* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

Specifications

Capacity	2/3 gal stainless steel tank
Electrical	115V, 1300 watts, 11.3A
Thermostat	Electronic adjustable from 190 °F to 210 °F (factory pre-set at 205 °F)
Insulation	Extra quiet. Meets U.L. flammability specification
Recommended Supply Pressure	15 - 125psi
Shipping Weight	Approximately 7 lb Tank, 9 lb w/ filtration system

Dimensions

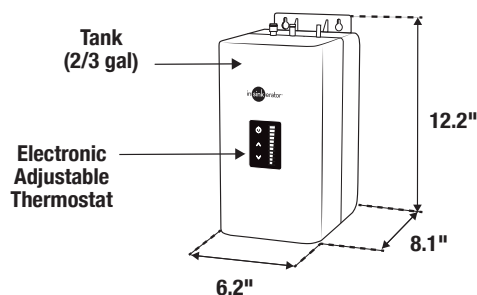

USA
1.800.558.5700
www.insinkerator.com

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

©2019 InSinkErator, InSinkErator® is a business unit of Emerson Electric Co. All Rights Reserved.