



ESTB. 1978

WATERWORKS

Grove Twenty



Rugged refinement. Handcrafted from California clay, Grove Twenty brings organic warmth and character throughout the home. Laced with tiny pinholes, these brown bricks are individually hand-glazed to highlight their slightly rustic texture, infusing each tile with unique movement and color variation. Choose from 4 field sizes and 12 versatile shades, including elegant neutrals and rich, vibrant tones.



ESTB. 1978

WATERWORKS

Grove Twenty

FIELD TILE



2 1/4" X 3 5/8" *



2 1/4" X 7 5/8" *



3 5/8" X 3 5/8" *



3 5/8" X 7 5/8" *

ARCHITECTURAL ELEMENTS



Standard Rail
2 3/8" X 7 5/8"



Bolection Rail
2" X 7 5/8"



Cove Base
3" X 7 5/8"



Cove Base 6" X 7 5/8"

* Coordinating single and corner glazed edges available



ESTB. 1978

WATERWORKS

Grove Twenty

PALETTE



Bliss V3




Argent V3




Alpine V3



Flint V3



Navy V3



Jet V3



Mariana V3



Aquamarine V3



Cypress V4



Morel V4



Poppy V4



Brunet V4

* See variation chart on page 4


** Surface texture is inherent in the material; glazes may crackle



ESTB. 1978

WATERWORKS

Grove Twenty

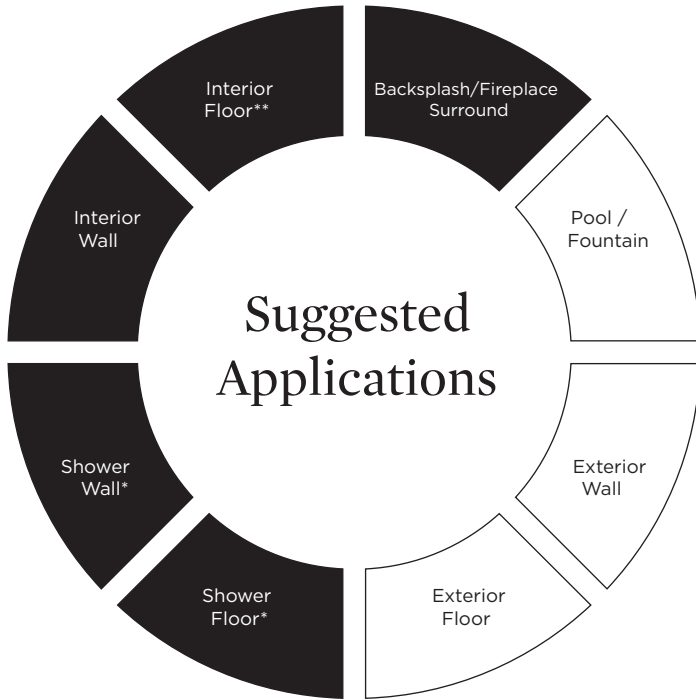

● Recommended Use ○ Not Recommended Use

Application Notes

* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained

** Suitable for light traffic floor ONLY

Variation Level

V1	V2	V3	V4	V5

1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness

5/8"*

*Nominal: +/- 1/8"

Suggested Grout Lines

1/8" - 1/4"

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.