

best®



PRICE SCHEDULE

EFFECTIVE MARCH 1, 2024

CONTENTS

CHIMNEY HOODS

WCP1	3
WCS1	4
WCT1	5
WPP1	6
WCB3	7

ISLAND HOODS

ICB3	8
-------------------	---

BUILT-IN HOODS

HBN1	9
PK22	11
CP5	13
CP3	15
CC6	16

CEILING HOODS

HBC1	17
-------------------	----

DOWNDRAFTS

D49M	18
-------------------	----

PRO-STYLE HOODS

WP28	23
UP26	25

UNDER-CABINET HOODS

UCB3	27
-------------------	----

OUTDOOR HOODS

WTD9M	28
CPD9M	29
WPD39M	30

ACCESSORIES

24" Duct Sections	31
Roof and Wall Caps	31
Dampers	31
Transitions.....	32
Elbows.....	32
Make-Up Air Dampers	32

BLOWER SYSTEMS

TIPS FOR SUCCESS

Choosing Proper Ventilation	40
Optimize Installation	41
Product Use & Accessories	42
Trusted Performance	43
Limited Warranty	43

PRODUCT SPEC INDEX



WCP1 SERIES

Recommended replacement for WTT32 series.



CLICK OR SCAN TO LEARN MORE

- Elegant, high-profile pyramidal hood, powered by an internal blower system with 650 CFM maximum.
- 0.3 sones at low speed is the equivalent to calm breathing.
- Voice activation provides hands-free ability to control the hood's power, fan speed and lights.
- SmartSense uses infrared sensors to monitor heat from the cooking surface and automatically adjusts hood fan speed to eliminate heat, CO₂ and other cooking emissions.
- The capacitive touch slider offers precise control from beneath the range hood, allowing its elegant lines to inspire.
- Heat-resistant, rectangular LED modules provide excellent task lighting.
- Dishwasher-safe, Hybrid Baffle™ filters effectively capture grease.
- Code Ready Technology® (CRT) can reduce airflow to 300 or 400 CFM to comply with local make-up air code requirements.
- Easy, single-person installation.
- Multiple ducting sizes (6" 8") and exhausts (vertical, horizontal and recirculating) help meet customer needs for new construction and remodeling. Recirculation kit sold separately.
- Minimum flue height is 30" and maximum is 43".

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
WCP1306SS	Stainless	30" x 30" x 22"	\$1259.00	\$1130.00
WCP1366SS	Stainless	36" x 30" x 22"	\$1379.00	\$1240.00
OPTIONS				
FLUE EXTENSION AEWCPISS		11'	\$429.00	\$386.00
NON-DUCT KIT ANKWCPSTI			\$277.00	\$249.00



WCS1 SERIES

Recommended replacement for WCP3 series.



CLICK OR SCAN TO LEARN MORE

- Elegant, high-profile pyramidal hood, powered by an internal blower system with 650 CFM maximum.
- 0.3 sones at low speed is the equivalent to calm breathing.
- Voice activation provides hands-free ability to control the hood's power, fan speed and lights.
- SmartSense uses infrared sensors to monitor heat from the cooking surface and automatically adjusts hood fan speed to eliminate heat, CO₂ and other cooking emissions.
- The capacitive touch slider offers precise control from beneath the range hood, allowing its elegant lines to inspire.
- Heat-resistant, rectangular LED modules provide excellent task lighting.
- Dishwasher-safe, Hybrid Baffle filters effectively capture grease.
- CRT can reduce airflow to 300 or 400 CFM to comply with local make-up air code requirements.
- Easy, single-person installation.
- Multiple ducting sizes (6", 8") and exhausts (vertical, horizontal and recirculating) help meet customer needs for new construction and remodeling. Recirculation kit sold separately.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
WCS1306BLS	Black Stainless	30" x 27" x 20"	\$1259.00	\$1130.00
WCS1306SS	Stainless	30" x 27" x 20"	\$1259.00	\$1130.00
WCS1366SS	Stainless	36" x 27" x 20"	\$1379.00	\$1240.00
OPTIONS				
FLUE EXTENSION AEWCS1SS		11'	\$429.00	\$386.00
NON-DUCT KIT ANKWCPST1			\$277.00	\$249.00



WCT1 SERIES

Recommended replacement for WBF4 series.



CLICK OR SCAN TO LEARN MORE

- Distinctive T-style hood offers a modern touch; powered by an internal blower system with 650 CFM maximum.
- 0.3 sones at low speed is the equivalent to calm breathing.
- Voice activation provides hands-free ability to control the hood's power, fan speed and lights.
- SmartSense uses infrared sensors to monitor heat from the cooking surface and automatically adjusts hood fan speed to eliminate heat, CO₂ and other cooking emissions.
- The capacitive touch slider offers precise control from beneath the range hood, allowing the hood's elegant lines to inspire.
- Heat-resistant, rectangular LED modules provide excellent task lighting.
- Dishwasher-safe, Hybrid Baffle filters effectively capture grease.
- CRT can reduce airflow to 300 or 400 CFM to comply with local make-up air code requirements.
- Easy, single-person installation.
- Multiple ducting sizes (6", 8") and exhausts (vertical, horizontal and recirculating) help meet customer needs for new construction and remodeling. Recirculation kit sold separately.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
WCT1306SS	Stainless	30" x 24" x 20"	\$1259.00	\$1130.00
WCT1366SS	Stainless	36" x 24" x 20"	\$1379.00	\$1240.00
OPTIONS				
FLUE EXTENSION AESCSTISS		11'	\$429.00	\$386.00
NON-DUCT KIT ANKWCPSTI			\$277.00	\$249.00



WPP1 SERIES

NEW in 2024. Recommended replacement for WPP9 series.



CLICK OR SCAN TO LEARN MORE

- Quiet iQ6 with 800 CFM maximum or iQ12 with 1500 CFM maximum internal blower.
- iQ blower with GPS technology provides up to 2x quieter operation, 30% faster smoke removal and is 22x more energy efficient.
- Ultra-quiet 0.3 sones at low speed.
- Luxurious seamless design creates an elegant look.
- Four-speed electronic controls placed discretely on the underside of the hood.
- Control features delay off and clean filter reminder.
- Bright, three-level LED lighting; two bulbs on 36" and 48" (included).
- Hybrid Baffle filters provide excellent ventilation efficiency.
- Heat Sentry® detects excessive heat and automatically adjusts blower to high.
- Telescopic flue accommodates 8' to 9' ceiling heights.
- Uses 8" round duct for iQ6 blower, 10" round duct for iQ12.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 800 CFM MAXIMUM INTERNAL IQ6 BLOWER*				
WPP1366SS	Stainless	36" x 30½" x 24"	\$2889.00	\$2600.00
RANGE HOODS WITH 1500 CFM MAXIMUM INTERNAL IQ12 BLOWER				
WPP13612SS	Stainless	36" x 30½" x 24"	\$3779.00	\$3400.00
WPP14812SS	Stainless	48" x 30½" x 24"	\$4219.00	\$3800.00
OPTIONS				
FLUE EXTENSION AEWPP1SBN		12'	\$736.00	\$662.00

* Limit CFM to 300 or 400 CFM with CRT to meet make-up air codes.



WCB3 SERIES



CLICK OR SCAN
TO LEARN MORE



- Available in brushed stainless steel with black or gray glass panels to accent contemporary kitchens.
- 30" and 36" wide.
- Internal blower with 650 CFM maximum.
- 1.4 sones at low speed.
- 3¼" x 10" vertical or horizontal discharge.
- Suitable for 8' to 9' ceiling heights.
- CRT can reduce airflow to 300 CFM to comply with local make-up air code requirements.
- PURLED light system boosts light output by 25%, distributes light 6x better and improves energy efficiency by 88%.
- Hybrid filter combines two filtering technologies; designed to capture 28% more grease.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
WCB3I30SBB	Stainless (Black Glass*)	29⅞" x 27" x 20¾"	\$1809.00	\$1620.00
WCB3I30SBS	Stainless (Brushed Gray Glass*)	29⅞" x 27" x 20¾"	\$1809.00	\$1620.00
WCB3I36SBB	Stainless (Black Glass*)	35⅞" x 27" x 20¾"	\$1889.00	\$1700.00
WCB3I36SBS	Stainless (Brushed Gray Glass*)	35⅞" x 27" x 20¾"	\$1889.00	\$1700.00
OPTIONS				
FLUE EXTENSION AEWCB3SB		10'	\$407.55	\$366.70

* Replacement glass panels available as service parts.



ICB3 SERIES



CLICK OR SCAN
TO LEARN MORE



- Available in brushed stainless steel with black or gray glass panels to accent contemporary kitchens.
- Internal blower with 650 CFM maximum.
- 1.2 sones at low speed.
- 8" vertical discharge.
- Suitable for 8' to 9' ceiling heights.
- CRT can reduce airflow to 300 CFM to comply with local make-up air code requirements.
- PURLED light system boosts light output by 25%, distributes light 6x better and improves energy efficiency by 88% (four light settings).
- Hybrid filter combines two filtering technologies, designed to capture 28% more grease.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
ICB3I36SBB	Stainless (Black Glass*)	35 ¹⁵ / ₁₆ " x 25" x 22"	\$2799.00	\$2520.00
ICB3I36SBS	Stainless (Brushed Gray Glass*)	35 ¹⁵ / ₁₆ " x 25" x 22"	\$2799.00	\$2520.00

* Replacement glass panels available as service parts.



HBN1 SERIES

Recommended replacement for P195 series.



CLICK OR SCAN TO LEARN MORE

- Winner of the 2022 Good Design Award.
- Built-in hood insert with a flush appearance that fits into almost any kitchen cabinet.
- Powerful 650 CFM maximum blower operates at 0.3 sones at low speed.
- 4-speed backlit, soft-touch control. Voice control with on-board Wi-Fi connectivity for hands-free operation.
- SmartSense uses infrared sensors to monitor heat from the cooking surface and automatically adjusts hood fan speed to eliminate heat, CO₂ and other cooking emissions.
- CRT can reduce CFM level to 300 or 400 CFM to comply with local make-up air code requirements.
- Bright, 3-level, heat-resistant LED modules enhance cooking experiences.
- Dishwasher-safe, Hybrid Baffle filters feature quick-release latch for easy removal.
- Easy, single-person installation.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 650 CFM MAXIMUM INTERNAL BLOWER				
HBN1246SS	Stainless	24" x 10 ¹ / ₁₆ " x 11 ¹ / ₁₆ "	\$899.00	\$800.00
HBN1306SS	Stainless	30" x 10 ¹ / ₁₆ " x 11 ¹ / ₁₆ "	\$929.00	\$830.00

Product accessories on the next page >

HBN1 SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
STAINLESS STEEL 15" DEEP EXTENSION FOR HBN1 24" HADTBN24	Stainless		\$40.00	\$36.00
STAINLESS STEEL 15" DEEP EXTENSION FOR HBN1 30" HADTBN30	Stainless		\$47.00	\$42.00
NON-DUCT KIT FOR HBN1 24" HARKBN24			\$132.00	\$119.00
NON-DUCT KIT FOR HBN1 30" HARKBN30			\$132.00	\$119.00
36" SIDE FILLER KIT FOR HBN1 30" HAWTBN36			\$58.00	\$52.00
ADA LOW-VOLTAGE WIRING KIT HAWRK5			\$96.00	\$86.00



PK22 SERIES



CLICK OR SCAN TO LEARN MORE

- Design fits flush to custom cabinet to protect cabinetry.
- Two LED bulbs included; three bulbs on 45".
- Powerful internal iQ12 Blower System with 1500 CFM maximum blower, driven by Guaranteed Performance System (GPS) technology, runs up to 2x quieter, clears smoke and odors up to 30% faster and is up to 22x more energy efficient than competitive blowers in its class.
- External (EX) versions offer exterior or in-line blowers from 675 to 1650 CFM maximum. **Blower sold separately.**
- Hybrid stainless steel baffle and aluminum mesh filters are dishwasher safe, provide quieter operation and capture grease more effectively.
- Four-speed LED push-button control for convenient range of ventilation choices.
- 10-minute delay off keeps hood running after cooking to clear the air.
- Clean filter prompt reminds owners to regularly clean filters so they capture grease at optimal levels.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Uses 10" duct.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 1500 CFM MAXIMUM INTERNAL IQ12 BLOWER				
PK2230	Stainless	27 ³ / ₄ " x 11" x 15 ¹³ / ₁₆ "	\$2169.00	\$1950.00
PK2239	Stainless	36 ¹ / ₂ " x 11" x 15 ¹³ / ₁₆ "	\$2269.00	\$2040.00
PK2245	Stainless	43 ⁷ / ₁₆ " x 11" x 15 ¹³ / ₁₆ "	\$2389.00	\$2140.00
RANGE HOODS FOR USE WITH EXTERIOR OR IN-LINE OPTIONS (BLOWER SOLD SEPARATELY)				
PKEX2239	Stainless	36 ¹ / ₂ " x 11" x 15 ¹³ / ₁₆ "	\$1309.00	\$1180.00
PKEX2245	Stainless	43 ⁷ / ₁₆ " x 11" x 15 ¹³ / ₁₆ "	\$1549.00	\$1390.00


Product accessories on the next page >

PK22 SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00
REMOTE CONTROL ACR3			\$119.00	\$107.00



CP5 SERIES



CLICK OR SCAN
TO LEARN MORE



- One-level LED lighting provides bright, clean energy-efficient light over the cooktop (two lamps included on 36", 42" and 48"; four lamps on 54", 60" and 66").
- Choice of a quiet iQ6 blower with 800 CFM maximum or iQ12 with 1500 CFM maximum or external blowers. **Blower sold separately on external models.**
- iQ blower with GPS technology provides up to 2x quieter operation, 30% faster smoke removal and is 22x more energy efficient.
- Recirculation option available on CP55IQ only.
- Hybrid Baffle filters provide excellent ventilation efficiency.
- Three-speed boost electronic controls include delay off and clean filter reminder.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 800 CFM MAXIMUM INTERNAL IQ6 BLOWER*				
CP55IQ369SB	Stainless	34 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$2329.00	\$2100.00
CP55IQ429SB	Stainless	40 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$2549.00	\$2290.00
RANGE HOODS WITH 1500 CFM MAXIMUM INTERNAL IQ12 BLOWER				
CP57IQT369SB	Stainless	34 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$2869.00	\$2580.00
CP57IQT489SB	Stainless	46 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$3019.00	\$2710.00
CP57IQT482SB	Stainless	46 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$3089.00	\$2770.00
CP57IQT542SB	Stainless	52 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$3539.00	\$3180.00
CP57IQT602SB	Stainless	58 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$3689.00	\$3310.00
CP57IQT662SB	Stainless	64 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$3959.00	\$3560.00
RANGE HOODS FOR USE WITH EXTERIOR OR IN-LINE OPTIONS (BLOWER SOLD SEPARATELY)				
CP57E362SB	Stainless	34 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$1789.00	\$1610.00
CP57E482SB	Stainless	46 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$2059.00	\$1850.00
CP57E602SB	Stainless	58 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$2429.00	\$2180.00

* Limit CFM to 300 or 400 CFM with CRT to meet make-up air codes.

Product accessories on the next page >

CP5 SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
NON-DUCT KIT ANKCP55 (CP55IQ only)			\$277.00	\$249.00
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00
REMOTE CONTROL ACR3			\$119.00	\$107.00



CP3 SERIES



CLICK OR SCAN
TO LEARN MORE

- Two LED bulbs included.
- Choice of models with 290, 670 or 1350 CFM maximum internal blowers.
- Dishwasher-safe baffle filter with handles.
- Variable-speed control with last setting memory.
- Heat Sentry detects excessive heat and adjusts blower to high automatically.
- 8" or 10" round duct connector with backdraft damper. CP34 and CP35 use 8" and CP37 uses 10".
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS WITH 290 CFM MAXIMUM INTERNAL BLOWER				
CP34I309SB	Stainless	28 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1299.00	\$1170.00
CP34I369SB	Stainless	34 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1359.00	\$1220.00
CP34I429SB	Stainless	40 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1469.00	\$1320.00
RANGE HOODS WITH 670 CFM MAXIMUM INTERNAL BLOWER				
CP35I309SB	Stainless	28 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1299.00	\$1170.00
CP35I369SB	Stainless	34 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1359.00	\$1220.00
CP35I429SB	Stainless	40 ³ / ₈ " x 11" x 19 ¹ / ₄ "	\$1469.00	\$1320.00
RANGE HOOD WITH 1350 CFM MAXIMUM INTERNAL BLOWER				
CP37I482SB	Stainless	46 ³ / ₈ " x 11" x 22 ¹ / ₂ "	\$2079.00	\$1870.00



CC6 SERIES

PURLED
LIGHTING SYSTEM

LIMITED
5/2
WARRANTY



CLICK OR SCAN
TO LEARN MORE

- 650 CFM maximum blower.
- PURLED light system boosts light output by 25%, distributes light 6x better and improves energy efficiency by 88%. Two LED bulbs included.
- Electronic push-button controls with LED (four ventilation speeds).
- 5-minute delay off function.
- Dishwasher-safe, thin baffle filters.
- Filter maintenance indicator.
- Heat Sentry detects excessive heat and automatically adjusts speed to high.
- Clasp springs ease installation.
- 3¼" x 10" ducted discharge, vertical or horizontal.

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOOD WITH 650 CFM MAXIMUM INTERNAL BLOWER				
CC65I28SB	Stainless	28½" x 10" x 14¾"	\$1409.00	\$1260.00



HBC1 SERIES

Recommended replacement for CC34 series.




CLICK OR SCAN TO LEARN MORE

- 650 to 1650 CFM maximum blower options for powerful, high-performance operation that meets virtually any cooking demands. **Blower sold separately.**
- 4-speed electronic controls offer the right speed for any cooking application.
- Three levels of LED light intensities supply as much light as needed.
- 10-minute delay off feature provides additional convenience and peace of mind.
- ADA capable via remote control to increase accessibility for all users.
- Dishwasher-safe, aluminum mesh grease filters.
- Blends seamlessly into the ceiling to help keep sightlines open.

Model No.	Finish	Size W x H x D	List Price/SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OR EXTERNAL OPTIONS (BLOWER SOLD SEPARATELY)				
HBC143ESS	Stainless	43" x 14" x 28"	\$2669.00	\$2500.00
HBC143EWH	White	43" x 14" x 28"	\$2669.00	\$2500.00
HBC163ESS	Stainless	63" x 14" x 28"	\$3459.00	\$3200.00
OPTIONS				
INTERNAL BLOWERS PM6*		650 CFM max	\$391.00	\$352.00
PM12		1260 CFM max	\$613.00	\$552.00
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00

* Limit CFM to 300 or 400 CFM with CRT to meet make-up air codes.

D49M SERIES



CLICK OR SCAN
TO LEARN MORE



STAINLESS STEEL
NEW DESIGN (AS PICTURED)
COMING MID-2024

- Raises to 18" at the touch of a button.
- Choice of quiet FLEXBLOWER® system with 650 CFM maximum or external blower options. **Blower sold separately.**
- LED lighting produces bright, clean light using minimal energy and has an extra long life span, so lights may never need replacement.
- Four-speed electronic controls include 10-minute delay off, clean filter reminder and Heat Sentry for convenient operation.
- Optional ACRD remote control button for convenient up/down operation.
- Mesh grease filters are hidden and easy to take out for cleaning by removing the front panel.
- Optional end cap extension adds 1" to width for 31", 37" and 49" applications for the perfect fit. Replacement end caps sold separately and include left-handed and right-handed.
- Decorative range trim kit option for free-standing range applications sold separately.
- Cooktop trim seal kit recommended for use with gas cooktops. Sold separately.
- Will work with optional universal make-up dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OR EXTERNAL OPTIONS (BLOWER SOLD SEPARATELY)				
D49M30BLS	Black Stainless	30" x 47" x 2"	\$2849.00	\$2550.00
D49M30SB	Stainless	30" x 47" x 2"	\$2599.00	\$2350.00
D49M36BLS	Black Stainless	36" x 47" x 2"	\$3049.00	\$2750.00
D49M36SB	Stainless	36" x 47" x 2"	\$2849.00	\$2550.00
D49M48SB	Stainless	48" x 47" x 2"	\$3499.00	\$3150.00

Product accessories on the next page >

D49M SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
INTERNAL BLOWER PF6*		650 CFM max	\$418.00	\$376.00
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
EXTERIOR BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00
NON-DUCTED RECIRCULATION KIT ANKD			\$260.00	\$234.00
RECIRCULATING FILTER REPLACEMENT AFCD			\$37.00	\$33.00
RANGE TRIM KITS ATKD30BLS	Black Stainless	30"	\$117.00	\$105.00
ATKD30SB	Stainless	30"	\$84.00	\$76.00
ATKD36BLS	Black Stainless	36"	\$122.00	\$110.00
ATKD36SB	Stainless	36"	\$91.00	\$82.00
ATKD48SB	Stainless	48"	\$111.00	\$100.00

* Internal PF6 blower can be reduced to 400 CFM.

D49M SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
TRIM ACCESSORIES ATTD1	Stainless		\$126.00	\$113.00
ATTD1BLS	Black Stainless		\$128.00	\$115.00
ATTD2 coming mid-2024	Stainless		\$126.00	\$113.00
ATTD2BLS coming mid-2024	Black Stainless		\$128.00	\$115.00
REMOTE CONTROLS ACRD	Stainless		\$182.00	\$164.00
ACRDBLS	Black Stainless		\$180.00	\$162.00
GAS COOKTOP TRIM SEAL KITS ATSKD30		30"	\$84.00	\$76.00
ATSKD36		36"	\$91.00	\$82.00
ATSKD48		48"	\$111.00	\$100.00
DUCT ACESORIES ACVPD8		8" round front panel	\$68.00	\$61.00
ACVPD10		10" round front panel	\$68.00	\$61.00
AEDD2		1 $\frac{7}{8}$ " x 19" x 2' duct	\$100.00	\$90.00
AVDKD8		1 $\frac{7}{8}$ " x 19" to 8" round	\$155.00	\$140.00
AVDKD10		1 $\frac{7}{8}$ " x 19" to 10" round	\$166.00	\$149.00
AVDKD219		1 $\frac{7}{8}$ " x 19" rectangular	\$69.00	\$62.00
AVDKD8810		Two 8" to 10" round	\$189.00	\$170.00
EXTENSION CABLE AEWD5			\$96.00	\$86.00



Option	Installation	Parts needed D49M (30", 36" and 48")
1	FRONT / Internal / In cabinet	PF6 - Internal blower 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap ANKD - Recirculation kit (optional)
2	FRONT / Internal / Under floor	PF6 - Internal blower ACVPD8 - Front panel rough-in plate 8" round 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap
3	FRONT / Exterior or in-line	EB9, EB15, ILB11 - Exterior or in-line blower ACVPD10 - Front panel rough-in plate 10" round 410 - 10" round duct 418 - 10" elbow (as required) 441 - 10" round wall cap (if ILB11 in-line blower is used)
4	REAR / Internal / In cabinet For clear front	PF6 - Internal blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 7/8" x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD8 - Transition to 8" round 408 - 8" round duct 432 - 8" elbow (as required) ANKD - Recirculation kit (optional)
5	REAR / Internal / Under floor For clear front	PF6 - Internal blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 7/8" x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD8 - Transition to 8" round 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap
6	REAR / Exterior or in-line For clear front FOR 48" slide-in range or applications with grill, recommend using option 9 with dual outlet and EB15.	EB9, EB15, ILB11 - Exterior or in-line blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 7/8" x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD10 - Transition to 10" round 410 - 10" round duct 418 - 10" elbow (as required) 441 - 10" round wall cap
7	LEFT OR RIGHT / Internal / In cabinet For clear front	PF6 - Internal blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 7/8" x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD8 - Transition to 8" round 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap ANKD - Recirculation kit (optional)



Option	Installation	Parts needed D49M (30", 36" and 48")
8	LEFT OR RIGHT / Internal / Under floor For clear front	PF6 - Internal blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 $\frac{7}{8}$ " x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD8 - Transition to 8" round 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap
9	LEFT OR RIGHT / Exterior or in-line For clear front FOR 48" slide-in range or applications with grill, recommend using option 9 with dual outlet and EB15	EB9, EB15, ILB11 - Exterior or in-line blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD219 - 1 $\frac{7}{8}$ " x 19" rectangular adapter AEDD2 - Optional rectangular duct AVDKD10 - Transition to 10" round (for single outlet) AVDKD8 (2) - Transition to 8" round (for dual outlet) ATKD8810 - "Y" Transition two 8" in to one 10" (for dual outlet) 441 - 10" round wall cap
10	BELOW vent / Internal / Under floor	PF6 - Internal blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD8 - Transition to 8" round 408 - 8" round duct 432 - 8" elbow (as required) 643 - 8" round wall cap ANKD - Recirculation kit (optional)
11	BELOW vent / Exterior or in-line FOR 48" slide-in range or applications with grill, recommend using option 9 with dual outlet and EB15	EB9, EB15, ILB11 - Exterior or in-line blower ATKD30SB/ATKD30BLS, ATKD36SB/ATKD36BLS, ATKD48SB - Range trim kit SS or BLS (if slide-in range) AVDKD10 - Transition to 10" round 410 - 10" round duct 418 - 10" elbow (as required) 441 - 10" round wall cap

ACRD/ACRDBLS: Remote up/down control. Stainless Steel/Black Stainless (optional).

AEWD5: 5' ext. cable for electrical panel. Only required if electrical panel is more than two feet away from downdraft.

Use up to two extension cables connected together.

ATTD1/ATTD1BLS: End cap trim extension to expand 1" overall trim width. Includes left and right trim caps. Stainless Steel/Black Stainless (optional).

For use with round-top D49M downdraft units manufactured before May 2024.

ATTD2/ATTD2BLS: End cap trim extension to expand 1" overall trim width. Includes left and right trim caps. Stainless Steel/Black Stainless (optional).

For use with flat-top D49M downdraft units manufactured May 2024 and after.

ATSKD30, 36, 48: Gas cooktop seal kit. Use if a gas cooktop is installed.

Note: For range top applications that are 48" or with grill, recommend Option 3 with EB15. For slide-in range applications with grill, recommend Option 9 using dual outlet with EB15.

For any additional support, please contact our BEST technical support at **800-637-1453**.



WP28 SERIES



CLICK OR SCAN
TO LEARN MORE



- Professional-style, 18" wall-mounted design.
- Double-wall construction for easy cleanup.
- LED lighting with two bulbs included on 30" and 36" or four bulbs on other sizes.
- Choice of eight blower options: three internal, the quiet iQ6 with 800 CFM maximum, iQ12 with 1500 CFM maximum, standard high-pressure P12 blower with 1300 CFM maximum, or five external blowers with up to 1650 CFM maximum. **Blower sold separately.**
- iQ blower with GPS technology provides up to 2x quieter operation, 30% faster smoke removal and is 22x more energy efficient.
- Hybrid Baffle filters provide excellent ventilation efficiency.
- Variable-speed rotary control with last setting memory.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Uses 8" round (iQ6) or 10" round (iQ12, P12) duct with internal blowers, 10" round with external blowers. Damper adapter included. Allows horizontal and vertical exhaust.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OR EXTERNAL OPTIONS (BLOWER SOLD SEPARATELY)				
WP28M30SB	Stainless	30" x 18" x 24"	\$1669.00	\$1500.00
WP28M36SB	Stainless	36" x 18" x 24"	\$1849.00	\$1660.00
WP28M42SB	Stainless	42" x 18" x 24"	\$2009.00	\$1800.00
WP28M48SB	Stainless	48" x 18" x 24"	\$2079.00	\$1870.00
WP28M54SB	Stainless	54" x 18" x 24"	\$2239.00	\$2010.00
WP28M60SB	Stainless	60" x 18" x 24"	\$2679.00	\$2400.00

Product accessories on the next page >

WP28 SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
OPTIONS				
INTERNAL BLOWERS iQ6*	with GPS	800 CFM max	\$1000.00	\$900.00
iQ12	with GPS	1500 CFM max	\$1458.00	\$1312.00
P12		1300 CFM max	\$613.00	\$552.00
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00

* Internal iQ6 blower can reduce airflow to 300 or 400 CFM to comply with local make-up air code requirements.



UP26 SERIES



CLICK OR SCAN
TO LEARN MORE



- Professional-style, under-cabinet design.
- LED lighting with two bulbs included on 30" and 36"; four bulbs on 42" and 48".
- Double-wall construction for easy cleanup.
- Choice of eight blower options: three internal, the quiet iQ6 with 800 CFM maximum, standard high-pressure P5 or P8 blowers, or five external blowers up to 1650 CFM maximum. **Blower sold separately.**
- iQ blower with GPS technology provides up to 2x quieter operation, 30% faster smoke removal and is 22x more energy efficient.
- Hybrid Baffle filters provide excellent ventilation efficiency.
- Variable-speed rotary control with last setting memory.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Uses 8" round duct for single internal blowers (iQ6) and 10" round for external blowers. Includes damper/adapter. All vertical exhaust.
- Uses 3 1/4" x 10" (P5) or 3 1/4" x 14" (P8) duct for blowers. Allows horizontal and vertical exhaust.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OR EXTERNAL OPTIONS (BLOWER SOLD SEPARATELY)				
UP26M30SB	Stainless	30" x 10" x 22"	\$1139.00	\$1020.00
UP26M36SB	Stainless	36" x 10" x 22"	\$1209.00	\$1090.00
UP26M42SB	Stainless	42" x 10" x 22"	\$1429.00	\$1280.00
UP26M48SB	Stainless	48" x 10" x 22"	\$1479.00	\$1330.00

Product accessories on the next page >

UP26 SERIES CONTINUED

Model No.	Finish	Size W x H x D	List Price/SRP	MAP
INTERNAL BLOWERS iQ6*	with GPS	800 CFM max	\$1000.00	\$900.00
P5		530 CFM max (V&H)	\$537.00	\$483.00
P8 (36", 42", 48")		950 CFM max (V&H)	\$974.00	\$877.00
EXTERIOR BLOWERS EB9	Brushed Aluminum	840 CFM max	\$1043.00	\$939.00
EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWERS ILB6	Galvanized	675 CFM max	\$948.00	\$853.00
ILB9	Galvanized	900 CFM max	\$1127.00	\$1014.00
ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00

* Internal iQ6 blower can reduce airflow to 300 or 400 CFM to comply with local make-up air code requirements.



UCB3 SERIES



CLICK OR SCAN TO LEARN MORE



- 30" wide.
- Internal blower with 550 CFM maximum.
- ENERGY STAR® qualified.
- 1.0 sone at low speed.
- 3¼" x 10" vertical or horizontal discharge.
- Suitable for 8' to 9' ceiling heights.
- PURLED light system boosts light output by 25%, distributes light 6x better and improves energy efficiency by 88%.
- Hybrid filter combines two filtering technologies; designed to capture 28% more grease.
- CRT can reduce airflow to 300 CFM to comply with local make-up air code requirements.

Model No.	Finish	Size W x H x D	List Price/SRP	MAP
RANGE HOODS WITH 550 CFM MAXIMUM INTERNAL BLOWER				
UCB3130SBB	Stainless (Black Glass*)	29⅞" x 5" x 20⅞"	\$1539.00	\$1390.00
UCB3130SBS	Stainless (Brushed Gray Glass*)	29⅞" x 5" x 20⅞"	\$1539.00	\$1380.00
UCB3130SBW	Stainless (White Glass*)	29⅞" x 5" x 20⅞"	\$1539.00	\$1380.00

* Replacement glass panels available as service parts.



WTD9M SERIES



CLICK OR SCAN
TO LEARN MORE



- Chimney style designed for outdoor patios and lanais.
- Constructed of corrosion-resistant brushed stainless steel.
- 36" and 48" widths.
- 30" depth.
- Internal blower with 1300 CFM maximum. **Blower sold separately.**
- Two LED bulbs.
- Stainless steel baffle filters.
- Variable-speed rotary control.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Ducted installation uses 10" round duct.
- Choose from three flues, based on ceiling heights of up to 12'. Sold separately. No standard flue included.

Model No.	Finish	Size W x H x D	List Price/SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OPTION (BLOWER SOLD SEPARATELY)				
WTD9M36SB	Stainless	36" x 15" x 30"	\$1989.00	\$1790.00
WTD9M48SB	Stainless	48" x 15" x 30"	\$2419.00	\$2180.00
OPTIONS				
INTERNAL BLOWER P12NA		1300 CFM max	\$481.00	\$433.00
FLUES AEWTD915SB	Stainless	8' - 8.5' Ceiling	\$357.00	\$321.00
AEWTD1629SB	Stainless	8.5' - 9.5' Ceiling	\$425.00	\$383.00
AEWTD3057SB	Stainless	9.5' - 12' Ceiling	\$615.00	\$554.00

CPD9M SERIES




CLICK OR SCAN
TO LEARN MORE



- Constructed of corrosion-resistant brushed stainless steel.
- 36" and 48" widths.
- 28 $\frac{3}{8}$ " depth.
- Internal blower with 1300 CFM maximum. **Blower sold separately.**
- Two LED bulbs.
- Baffle filters.
- Variable-speed rotary control.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Ducted installation uses 10" round duct.

Model No.	Finish	Size W x H x D	List Price/SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OPTION (BLOWER SOLD SEPARATELY)				
CPD9M363SB	Stainless	36" x 12" x 28 $\frac{3}{8}$ "	\$1849.00	\$1660.00
CPD9M483SB	Stainless	48" x 12" x 28 $\frac{3}{8}$ "	\$2109.00	\$1900.00
OPTIONS				
INTERNAL BLOWER P12NA		1300 CFM max	\$481.00	\$433.00

WPD39M SERIES



CLICK OR SCAN TO LEARN MORE



- Constructed of corrosion-resistant brushed stainless steel.
- Professional-style, deep 30" design.
- LED lighting (bulbs included): two on 36"; three on 48" and 60".
- Choice of internal or external blowers for powerful and quiet operation.
Blower sold separately.
- Stainless steel baffle filters with handles.
- Special, non-stick surface on filter grease rails and removable grease tray for easy cleanup.
- Variable-speed rotary controls with separate on/off switch for last setting memory.
- Heat Sentry detects excessive heat and automatically adjusts blower to high.
- Optional telescopic flue cover for standard depth installations for 10' to 12' ceilings.
- 10" round duct with 1300 CFM maximum internal blower or external blowers.
- Designed to work with optional universal make-up air dampers. Fresh air wall caps are required for make-up air dampers (see page 32).

Model No.	Finish	Size W x H x D	List Price / SRP	MAP
RANGE HOODS FOR USE WITH INTERNAL OR EXTERNAL OPTIONS (BLOWER SOLD SEPARATELY)				
WPD39M36SB	Stainless	36" x 18" x 30"	\$2549.00	\$2290.00
WPD39M48SB	Stainless	48" x 18" x 30"	\$2869.00	\$2580.00
WPD39M60SB	Stainless	60" x 18" x 30"	\$3209.00	\$2880.00
OPTIONS				
DECORATIVE FLUE COVER (STANDARD 30" DEPTH) AEWPD3054SB	Stainless	30" - 54"	\$814.00	\$733.00
INTERNAL BLOWER P12		1300 CFM max	\$613.00	\$552.00
EXTERIOR BLOWER EB15	Brushed Aluminum	1650 CFM max	\$1761.00	\$1585.00
IN-LINE BLOWER ILB11	Galvanized	1500 CFM max	\$1332.00	\$1199.00

Accessories

24" DUCT SECTIONS

Model No.	Description	List Price /SRP	MAP
408	8" round	\$32.00	\$29.00
410	10" round	\$36.00	\$32.00

ROOF AND WALL CAPS

Model No.	Description	List Price /SRP	MAP
441	10" round wall cap	\$116.00	\$104.00
610FA	10" aluminum fresh air inlet wall cap	\$153.00	\$138.00
634	3¼" x 10" or up to 8" round roof cap	\$57.00	\$51.00
639	3¼" x 10" wall cap	\$38.00	\$34.00
641	6" round wall cap	\$80.00	\$72.00
641FA*	Aluminum fresh air inlet wall cap for 6" round duct	\$64.00	\$58.00
643	8" round wall cap	\$102.00	\$92.00
643FA*	Aluminum fresh air inlet wall cap for 8" round duct	\$95.00	\$86.00

* Fresh air wall caps are required for make-up air dampers for 641FA and 643FA models.

DAMPERS

Model No.	Description	List Price /SRP	MAP
421	10" damper	\$52.00	\$47.00

TRANSITIONS

Model No.	Description	List Price/SRP	MAP
412H	3¼" x 10" to 7" round; vertical discharge (412H replaces 412)	\$35.00	\$32.00
413	3¼" x 10" to 8" round; vertical discharge	\$38.00	\$34.00
414	8" to 10" round	\$56.00	\$50.00
423	4½" x 18½" to 10" round; vertical discharge	\$73.00	\$66.00
427	4½" x 18½" to 10" round; lateral	\$78.00	\$70.00
459	3¼" x 14" to 8" round	\$51.00	\$46.00

ELBOWS

Model No.	Description	List Price/SRP	MAP
418	10" round adjustable	\$49.00	\$44.00
432	8" round adjustable	\$37.00	\$33.00

UNIVERSAL/AUTOMATIC MAKE-UP AIR DAMPERS*

Model No.	Description	List Price/SRP	MAP
MD6T	6" automatic make-up air damper	\$191.00	\$172.00
MD6TU	6" universal automatic make-up air damper with pressure sensor kit	\$272.00	\$245.00
MD8S	8" make-up air slave damper (damper only)	\$215.00	\$194.00
MD8T	8" automatic make-up air damper	\$211.00	\$190.00
MD8TU	8" universal automatic make-up air damper with pressure sensor kit	\$299.00	\$269.00
MD10TU	10" universal automatic make-up air damper with pressure sensor kit	\$394.00	\$355.00

* Fresh air wall caps are required for make-up air dampers for 641FA and 643FA models. See **Roof and Wall Caps** section on previous page.

BEST iQ BLOWER SYSTEM



CLICK OR SCAN
TO LEARN MORE



Three ways to maximize quiet operation

We designed the iQ blower to inherently operate at a considerably quieter rating than traditional blowers. It's up to two times quieter than standard blowers. Three features make quiet operation possible.

- 1 Blower housing design** lowers airflow turbulence, reducing sound at high speeds.
- 2 Blower wheel design** delivers greater airflow at lower RPMs.
- 3 Its digital direct current (DC) motor** is balanced to minimize vibration typically found in alternating current (AC) motors.

Technology built for energy efficiency. Advanced DC motor technology is at the heart of the iQ blower. This balanced, digital motor uses as little as 8 watts of power. Its built-in control board optimizes blower speed so it doesn't overwork. The result is up to 22 times more energy efficiency than standard blowers—savings users will continue to see over the life of the product.

Nothing surpasses BEST iQ blowers in performance, sound and energy use

Many great advantages to the iQ Blower System make users' lives more comfortable and ensure confidence in the operation and effectiveness of BEST range hoods. Standard range hoods lose performance due to home duct systems that reduce the speed of smoke and cooking odor removal. iQ blowers with GPS technology calibration enable up to 30% faster smoke removal. For the first time, a range hood delivers the performance buyers expect—and pay for.

Flexible operation in three modes

iQ technology offers operational flexibility based on each unique installation. Whether optimizing duct runs in a new home or dealing with existing installation challenges, the iQ blower delivers impressive performance, regardless of the mode in which it's used. Here's how:

- 1 Full-rated performance** from the iQ Blower System is assured with GPS technology and the use of specified duct sizes. The hood self-calibrates to the installation at the push of a button. From there, the blower ensures optimal CFM and meets the specified ratings.
- 2 Peak performance** in restricted or limited duct installations is possible with GPS technology. If the duct system design requires smaller sizes than recommended, iQ considers the duct restrictions and calibrates to the highest (peak) CFM possible. The result is significantly greater performance levels than standard hoods can achieve without iQ. The iQ blower can be recalibrated at any time to ensure the range hood delivers the performance users expect.
- 3 Standard performance** enables range hoods to be installed and used at factory settings. This delivers the performance our standard high-pressure blowers achieve, which have led the industry for decades.

Confident performance


Builders, designers and consumers should not compromise performance to meet unique application or code requirements. BEST introduces our new Code Ready Technology (CRT), a feature offered on all BEST models with the CRT logo. CRT allows installers to set the maximum blower speed to achieve the right level of performance in one convenient model. This technology also addresses local codes or make-up air requirements. Design to your specs and let BEST handle the rest.

BEST iQ BLOWER SYSTEM




Intelligent, quiet and energy efficient

Hear the difference. Whether operating at different speeds, a BEST iQ Blower System is much quieter than competing blowers in the same class.

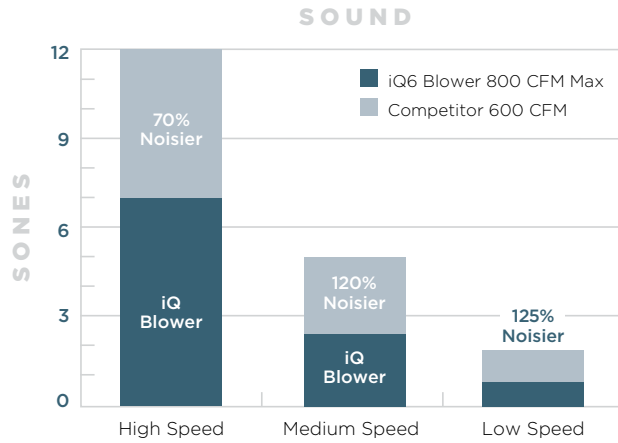


Clears air faster. Independent tests prove the BEST iQ blower clears air up to 30% faster than competing blowers with similar CFM ratings.

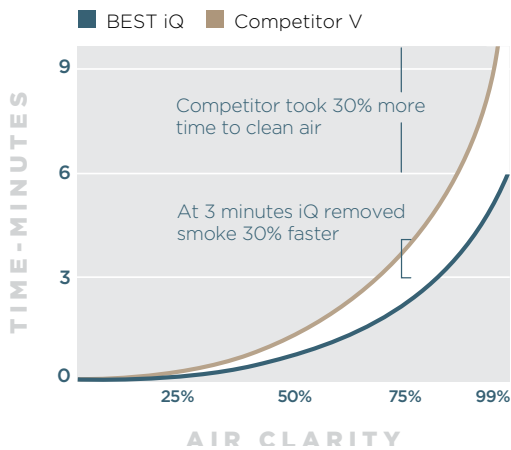

BEST iQ cleared 1800 cubic feet of smoke from a 10 x 10 x 9 foot room, using the same size hoods, at the same rated CFM, with the same ductwork.

Energy savings add up. Whether homeowners choose an 800 or 1500 CFM iQ blower, the savings add up over the lifetime of the product.

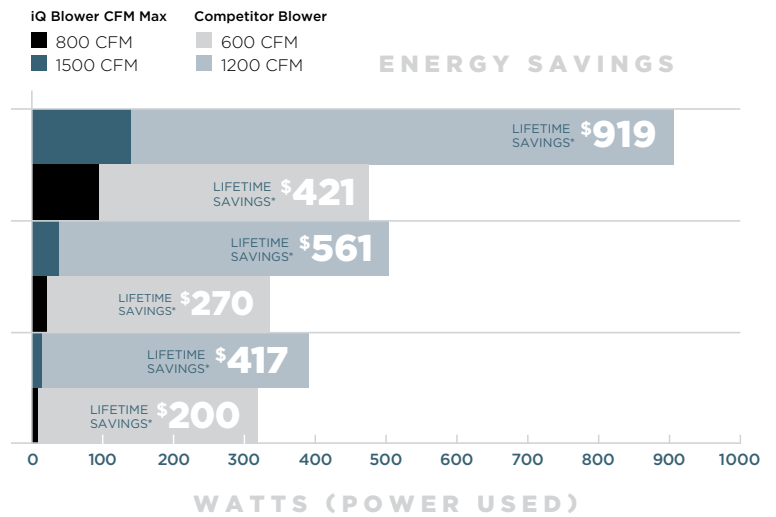


*Lifetime savings based on average usage of 2.73 hours per day for 11 years @ \$0.11/Kwh.

Internal BLOWERS



BEST internal blowers perform exceptionally with comfortable sound levels. Durable construction features meet the needs of professional-style cooking appliances in today's homes. The table below will help identify a blower matched to the heat output of the chosen range hood. See page 40 for more information on selecting the right blower for the user's range or cooking style.

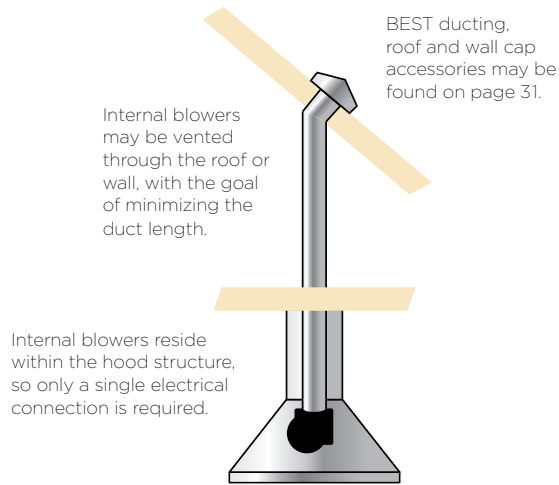

Series	P5	PF6	iQ6	P8	P12	P12NA	PM6	PM12	iQ12
Type	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal
CFM maximum	530	650	800	950	1300	1300	650	1260	1500
Sones at Normal Settings	0.6	0.8	0.3	1.3	2.0	2.0	0.3	0.3	0.6
Duct Size	3¼"x10"	8" round, 10" round, 1⅞" x 19"	8" round	3¼"x14"	10" round	10" round	8" round	10" round	10" round
Recommended Transition	412H	AVDKD8, AVDKD10	NA	459	NA	NA	NA	NA	NA
Duct Direction	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal
Backdraft Damper	Yes	No	Yes	Yes	Yes	No	Yes	Yes	Yes
Amps at 120V	1.8	3	3.8	3.4	6	6	3.3	6.6	7.6
Motor Type ¹	Single Speed	Four Speed	BLDC	Single Speed	Single Speed	Single Speed			BLDC
Hood Compatibility with Modular Blower	UP26	D49M	UP26 WP28	UP26 (36", 42" & 48")	WP28 WPD39M	WTD9M CPD9M	HBC1	HBC1	WP28


¹ All BEST blower motors are thermal overload protected.

External In-line BLOWERS

BEST in-line blowers perform exceptionally and reduce sound levels by moving the blower mechanism away from the point of use. Durable, sealed blowers meet the rigorous needs of professional-style cooktops and ranges. The table below will help identify an in-line blower matched to the selected range hood's heat output. See page 40 for more information on selecting the right blower for the user's range or cooking style.



BEST In-line blowers are installed between the point of use and the duct termination point. In-line blowers may be installed in an attic space, utility room or crawl space.

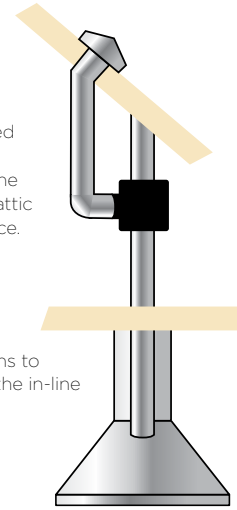


BEST ducting, roof and wall cap accessories may be found on page 31. In-line blowers may be vented through the roof or wall, with the goal of minimizing the duct length.

Electrical connections to both the hood and the in-line blower are required.

Series	ILB6	ILB9	ILB11
Type	In-line	In-line	In-line
CFM maximum	675	900	1500
HVI Performance (High Speed)	600	800	1100
Unit Dimensions ³ W x H x D	21½" x 11¾" x 12¼"	22" x 18" x 18"	22" x 18" x 18"
Duct Inlet ¹ /Outlet	10"/10" round	10"/10" round	10"/10" round
Duct Direction	Vertical or Horizontal	Vertical or Horizontal	Vertical or Horizontal
Backdraft Damper	Yes	Yes	Yes
Amps at 120V	2.9	3.0	5.0
Motor Type ²	Single Speed	Single Speed	Single Speed
Hood Compatibility ¹ with External Blower	HBC1 D49M UP26 WP28 All EX and E models	HBC1 D49M UP26 WP28 All EX and E models	HBC1 D49M UP26 WP28 WPD39M All EX and E models

Suspending the in-line blower with a chain mounting kit (included) is recommended to minimize noise and vibration.

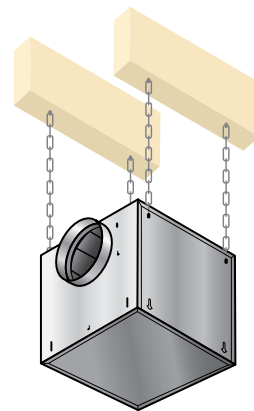

¹ Most "EX" and "E" models require a transition (model 414) from 8" to 10" for use with external blowers. BEST blowers are designed and UL Certified for use with BEST products only.

² All BEST blower motors are thermal overload protected.

³ For more detailed information visit bestrangehoods.com


External Exterior BLOWERS

BEST exterior blowers perform exceptionally at minimal sound levels by moving the blower to an exterior wall or the roof. Exterior blowers handle the rigorous needs of professional-style cooktops and ranges. We crafted durable, sealed blower housings from weather-resistant aluminum that can be painted to match roof or wall color schemes. The table below will help identify an exterior blower matched to the heat output of the chosen range hood. See page 40 for more information on selecting the right blower for the user's range or cooking style.



BEST exterior blowers are installed at the duct termination point (roof or exterior wall), providing the greatest distance between the point of use and the blower.



Electrical connections to both the hood and the exterior blower are required.

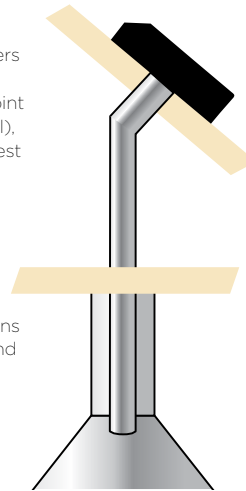



Exterior blowers may be vented through the roof or wall, with the goal of minimizing sharp turns in the duct that can impede airflow.

Series	EB9	EB15
Type	Exterior	Exterior
CFM maximum	840	1650
HVI Performance (High Speed)	840	1500
Duct Size ¹	10" round	10" round
Duct Direction	Vertical ⁴	Vertical ⁴
Backdraft Damper ²	Yes	Yes
Amps at 120V	5.7	4.3
Motor Type ³	Single Speed	Single Speed
Hood Compatibility ¹ with External Blower	HBC1 D49M UP26 WP28 All EX and E models	HBC1 D49M UP26 WPD39M All EX and E models

EB9



EB15



¹ Most "EX" & "E" models require a transition (model 414) from 8" to 10" for use with external blowers. BEST blowers are designed and UL Certified for use with BEST products only.

² In cold climates, a separate in-line damper (model 421) is recommended.


³ All BEST blower motors are thermal overload protected.

⁴ Exterior blower duct connection can be attached to the back (horizontal) of the WP28.








Duct ACCESSORIES

BEST ductwork accessories are matched to our range hood requirements. These elbows, extensions and duct transition accessories ensure proper airflow and volume requirements. Refer to individual product requirements for details.

412H	413	414	421	441	459	610FA
 3¼" x 10", to 7" round, vertical	 3¼" x 10", to 8" round, vertical	 8" to 10" round	 10" in-line damper Install only into vertical duct section	 Wall 10" round, paintable	 3¼" x 14", to 8" round, vertical	 10" fresh air duct
634	639	641	641FA	643	643FA	
 Roof, 6" to 8" round, or 3¼" x 10", black	 Wall, 3¼" x 10", aluminum (Wall, 3¼" x 14", painted black)	 Wall, 6", aluminum	 6" fresh air duct	 Wall, 8", aluminum	 8" fresh air duct	

Elbow Model		Duct Model	
432	418	408	410
 8" round	 10" round	 8" round, smooth, 2' section	 10" round, smooth, 2' section

BEST D49M Downdraft Ducting Accessories

Front Panels		Rectangle	Transitions		Rectangular Adapter	Y Transition
ACVPD8	ACVPD10	AEDD2	AVDKD8	AVDKD10	AVDKD219	AVDKD8810
 8" round	 10" round	 17⁄8" x 19", 2' section	 17⁄8" x 19" to 8" round	 17⁄8" x 19" to 10" round	 17⁄8" x 19"	 2 x 8" round & 10" round

Make-up Air DAMPERS

BEST automatic make-up air dampers are the first to synchronize kitchen, bath and whole-house ventilation product operation. These effective and affordable dampers are simple to install and require no special wiring to keep homeowners breathing easy. Intelligent design options ensure optimum ventilation in a variety of installations and applications.

Online range hood make-up air specifying tool

guides the right make-up air damper system design for any home.

Try it at bestrangehoods.com/specifier-tools/muad

- Economical, ruggedly constructed galvanized motorized damper.
- Can be controlled by more than one BEST ventilation product.
- Damper opens automatically to replace the air ventilation fans or range hoods exhaust, and then closes tightly when ventilation fans are turned off.
- Prevents excess air from entering the home during heating or cooling calls, reducing energy consumption.
- Interlocked systems meet IRC code requirements for make-up air with range hoods.




MD6TU / MD8TU / MD10TU Universal Design. Works with any BEST range hood over 300 CFM. Provides interlocked make-up air without requiring a direct wire connection.


MD6T / MD8T / MD10T. Balances indoor air pressure by providing make-up air for select BEST range hoods. Requires direct wire to hood.

641FA / 643FA / 610FA Inlets. Fresh air inlets in 6", 8" or 10" models are required to bring outdoor air inside.

MD6TU / 8TU / 10TU INSTALLATION

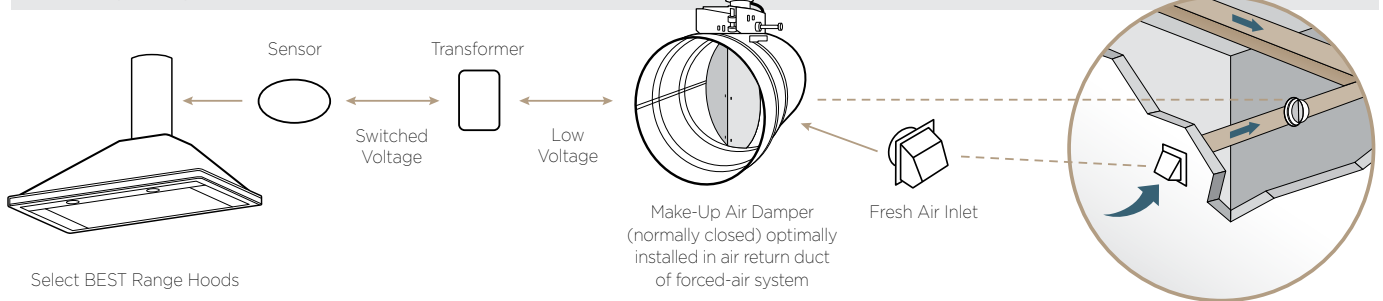

MD6T / 8T / 10T INSTALLATION

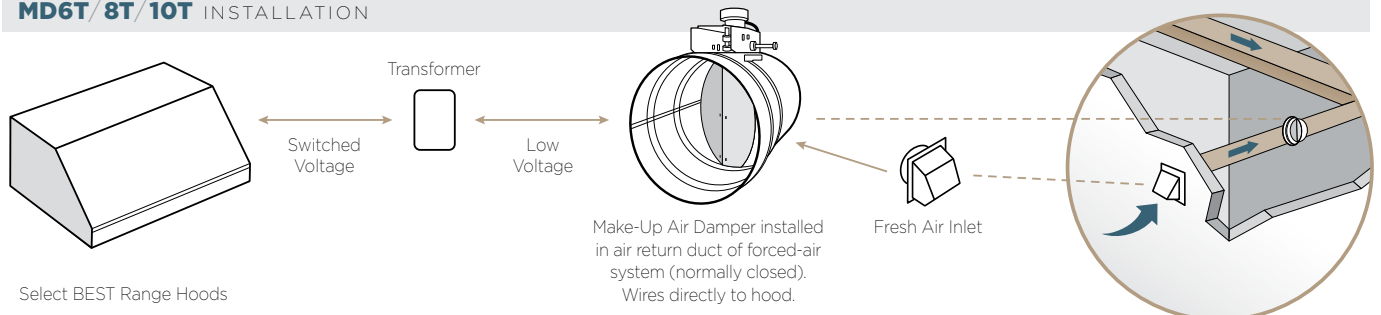

Choosing Proper Ventilation

Consider ventilation first

Consider ventilation requirements first when designing the kitchen to simplify duct installation and application issues. Ventilation removes the airborne particles to the outdoors. Recirculation filters catch some particles in the immediate cooking area, but vapors and moisture remain inside the house.

Observe and address crosscurrents

Crosscurrents can affect range hood capture ability. Windows, patio doors, ceiling fans, forced heating registers, and garage entry doors are prime crosscurrent sources. Range hoods are more effective features that block crosscurrents from moving directly over the cooking surface.

Range hood ducting

Select a termination point on the roof or wall and create the shortest possible duct path with fewest turns back to the hood location(s). Next, determine the largest possible duct size without constriction while keeping in mind, bigger ducts are better. Now consider hoods with this size (or area) duct connection. Smaller ducting will sacrifice performance and increase sound levels. When planning termination at the hood, note that some hoods allow duct attachment through the top or back of the hood.

To achieve peak exhaust rates at the lowest sound levels

- Never make the size or area of the ductwork smaller than the size that originates at the hood.
- Bigger ductwork is better.
- Keep duct length less than 50 linear feet.
- Minimize use of elbows and transitions (4 or less).
- Always separate 90-degree elbows with at least 2 feet of straight ductwork.
- When using a remote exterior blower, using one 90-degree elbow will reduce noise transmission into the hood.
- Place transitions at least 1 foot from the hood outlet or remote blower inlet.

Sizing the range hood

First, determine if the cooking equipment will be conventional (cooktop less than 60,000 BTU) or high-performance (over 60,000 BTU). To reach a starting point, use the following formulas or the cooktop manufacturer's recommendation:

Under 60,000 BTU: 100 CFM per foot of cooktop width. Example: 36" wide wall application indicates a need for 300 CFM.

Over 60,000 BTU: 1 CFM for each 100 BTU output of the cooktop. Example: 60,000 BTU indicates a need for 600 CFM.

If there is a grill or griddle in the cooktop, add 200 CFM to the estimate. Example: 60,000 BTU = 600 CFM + 200 CFM for grill = total 800 CFM.

For island installation, more CFM is needed.

Conventional cooktops use 150 CFM per foot of cooktop, and high-performance cooktops add 100 CFM to the estimate.

For the quietest possible operation, choose a model with the highest CFM, even if it is more than needed. This will allow the hood to operate at lower normal speeds where sound can be 50% quieter with appropriate duct size.

Determining adequate capture capability

The range hood's capture area is typically defined by the outer most perimeter of the hood bottom. The sump is the inverted area of the hood bottom that acts like a container to hold the inrush of heat and smoke until the blower can drain it away, preventing smoke from spilling over the edge. If possible, select range hood designs that have at least a 1" deep sump. For high-performance cooktops, select a model with an increased sump size. If that is not possible, increase the CFM.

CONCEPTS AND TERMS

Sones: A common unit of measurement for noise. It is used to rate ventilation fans in a manner that corresponds to the way people sense loudness. The average conventional range hood is rated at 6.0-7.0 sones. The number one reason most people do not use the range hood is noise.

~4 sones is comparable to everyday conversation

<1.0 sones is comparable to a quiet refrigerator

<0.3 sones is the quietest sone rating obtainable- it is comparable to calm breathing



Optimize Installation

Unit dimensions in this catalog

When designing aesthetics to complement a BEST range hood (custom cabinetry, tile, shelving, etc.) or aligning permanently affixed elements before the range hood is installed, be sure to have the product in hand first to check measurements and positioning. Unit dimensions for products in this catalog are subject to normal manufacturing tolerances.



Look for design flexibility

Meet code. Save time and money. Expand design flexibility. Our CRT is a feature in BEST products with iQ6 and select high-pressure blowers that allows for uncompromised performance and design. CRT allows installers to set the maximum blower speed to achieve the right level of performance, another solution to address local codes or make-up air requirements.

Determine range hood coverage


At a minimum, the range hood width should extend to the width of the cooktop and cover 100% of back burners and 50% of front burners. Range hoods can be wider and deeper. In some locations, code requires the width of the hood to extend 6" beyond the cooking surface.

Think about installation height

All range hoods have a recommended range of installation height over the cooking surface. Install the hood at the lowest recommended height for more effective coverage. The lowest level is the UL safety tested distance. The upper limit is a recommendation that will provide satisfactory capture. If the hood is installed below the lower limit, it could damage the hood and an inspector could force reinstallation. Going above the upper limit is the installer's choice and will have no effect on the hood but may result in reduced smoke capture. If the hood is above the upper limit, add 100 CFM for every 3" above the recommended height, and increase the hood width so it extends 6" beyond the cooktop.

Technical/installation documentation

Technical and installation documents are available online at bestrangehoods.com, or through our Tech Support at **800-637-1453**.

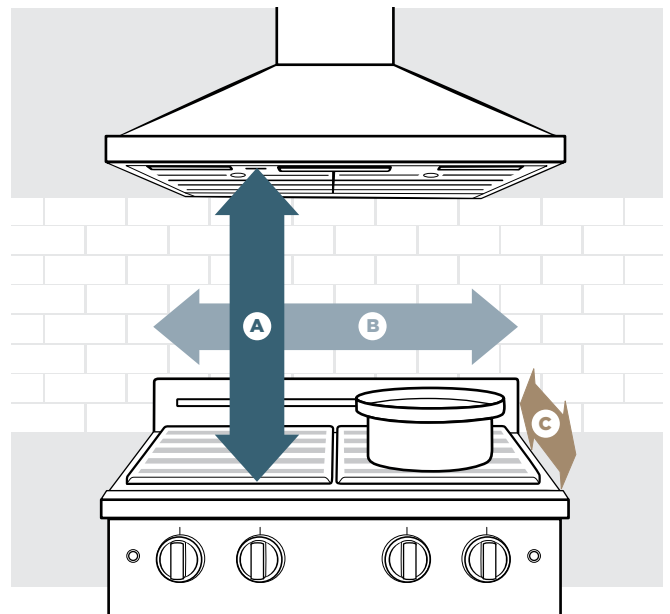

- A Height** 24"-30" above the cooking surface is typical.
- B Width** Minimum hood width should match the width of the cooktop.
- C Depth** Minimum hood depth should cover 100% of the back burners, and 50% of the front burners.

Product Use & Accessories

Reversible telescopic flues

Some BEST range hoods have reversible flues with slots on one end, allowing for non-ducted installations. Air that passes through the mesh and charcoal filters recirculates into the kitchen. In ceiling installations over 8', the slots may be visible, depending on how far the telescopic flue is extended.


Contact Tech Support at **800-637-1453** for details.

Flue extensions

Optional flue extensions are available for most chimney range hoods. For professional-style hoods, a soffit flue adds height to the top of the hood.

Chimney flue extensions

- Seamless construction
- Designed for ducted applications unless specifically noted
- Hood matching finishes
- Replaces the upper section of standard flue extension that comes with hood

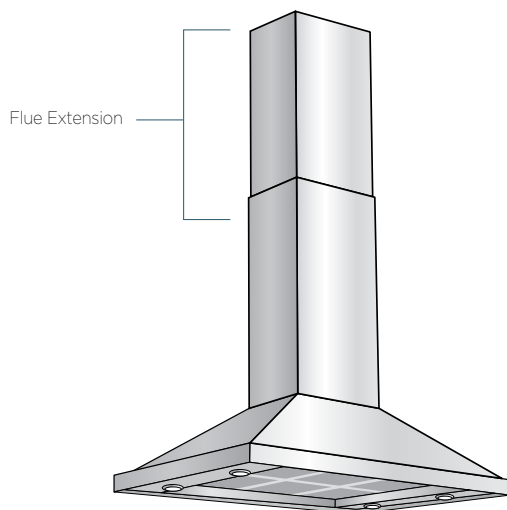

Range hood filters

Filtration keeps more grease byproducts out of the hood and duct system and in the filter, which can be removed and easily cleaned in the dishwasher. Baffle filters are good choices for grilling or frying but must be operated at high speed to get the best filtering results. Mesh filters work well regardless of the hood speed, allowing effective, quiet operation. Hybrid Baffle filters combine baffle and mesh features for the best of both worlds.

Charcoal filters

Non-ducted, recirculating installations require charcoal filters. These filters help trap cooking aromas and need to be replaced on a regular basis, depending on the user's cooking style. Order replacement filters through your BEST dealer or online at bestrangehoods.com.

Product use

BEST range hoods are designed for use with indoor residential cooking products, except when noted for outdoor use. They are not for use with charcoal grills of any kind.

Stainless steel types

BEST range hoods use two stainless steel grades. Corrosion-resistant stainless steel is recommended for protected outdoor applications and installations along saltwater coastal areas. This type of stainless steel resists the effects of corrosive environments. Brushed stainless steel is suitable for all interior installations.

Trusted Performance

Performance testing

Broan tested each product for airflow performance using the ANSI/AMCA 210 Standard, which is equivalent to the Home Ventilating Institute (HVI) 916 Air Flow Test Procedure. Broan also tested each product for sound performance using the ANSI S12.51 Standard, which is equivalent to the HVI 915 Procedure for Loudness Rating of Residential Fan Products.



Limited 5/2 warranty

To help keep range hoods in proper working order, BEST offers a 5-year parts, 2-year labor limited warranty. See full terms and conditions at bestrangehoods.com/warranty



UL listed. (Underwriters Laboratories tested and approved).



Evaluated by UL to Canadian Standard C22.2 NO. 113.

HVI MEMBER Advancing the Value of Residential Ventilation for Healthier Living.

The Home Ventilating Institute (HVI) is an independent laboratory that certifies the performance of North American home ventilating products. Please refer to their website, www.hvi.org, to access a complete HVI certified products listing.

All HVI-certified hoods are tested in a standard installation environment using a 10' ducting, a 90-degree elbow and damper. Independent laboratory tests guarantee customers their range hood will provide the power and performance they need. If a range hood is not HVI certified, there are no performance guarantees when the hood is on. This feature is one of the most significant advantages of Broan Group products, since no other manufacturers can provide the breadth of HVI-certified products.

Learn more on HVI ratings for each of our hood products by visiting their product pages at bestrangehoods.com

BEST is a registered trademark of Broan®, a proud member, in good standing, of the Home Ventilating Institute.

All sales are governed by terms and conditions available at bestrangehoods.com/owner-support/warranty. Buyers' additional or different terms are hereby rejected.

Product Specs

Model	UPC Code	Weight	Length	Width	Height	Cube
408	026715229659	2.20	2.00	0.67	0.67	0.89
410	026715022748	20.00	0.85	0.82	2.06	1.43
412H	026715002689	1.45	0.88	0.87	0.65	0.50
413	026715015993	1.90	1.03	1.03	0.87	0.91
414	026715075478	2.00	1.03	1.02	0.90	0.93
418	026715059454	3.40	1.13	1.12	0.90	1.14
421	026715039005	2.20	1.00	1.03	0.88	0.90
423	026715039029	3.60	1.60	0.95	0.95	1.44
427	026715126071	2.50	1.65	0.94	0.60	0.93
432	026715229666	1.95	1.02	1.00	0.85	0.87
441	026715039081	3.80	1.18	1.15	0.32	0.43
459	026715153794	1.90	1.28	0.67	0.77	0.65
610FA	026715211050	2.50	1.13	1.13	0.90	1.13
634	026715002658	5.10	1.60	1.21	0.63	1.21
639	026715002641	2.50	1.11	0.81	0.53	0.47
641	026715011377	1.30	0.79	0.79	0.67	0.42
641FA	026715192069	1.20	0.79	0.79	0.67	0.42
643	026715022946	2.40	1.13	1.13	0.88	1.13
643FA	026715192076	2.40	1.13	1.13	0.89	1.14
ACR3	026715231454	0.25	0.42	0.25	0.08	0.01
ACRD	026715234301	0.60	0.73	0.28	0.28	0.06
ACRDBLS	026715255757	0.60	0.73	0.28	0.28	0.06
ACVPD10	026715234363	3.15	1.11	1.10	0.18	0.21
ACVPD8	026715234998	3.35	1.11	1.10	0.18	0.21
AEDD2	026715234400	8.10	2.06	1.65	0.24	0.82
AEWCB3SB	026715259908	18.00	3.03	2.08	0.66	4.14
AEWCPISS	026715269891	22.25	3.25	1.08	2.14	7.52
AEWCSTISS	026715271351	23.00	3.42	1.23	1.35	5.65
AEWD5	026715234417	0.80	0.73	0.28	0.28	0.06
AEWPD3054SB	026715227419	42.45	2.38	1.40	2.90	9.64
AEWPP1SBN	0772371159907	27.70	3.42	1.25	1.35	5.78

Model	UPC Code	Weight	Length	Width	Height	Cube
AEWTD1629SB	026715258543	18.10	1.37	1.25	2.65	4.52
AEWTD3057SB	026715258550	30.00	1.38	1.23	3.17	5.35
AEWTD915SB	026715258536	19.00	1.35	1.25	2.63	4.44
AFCD	026715234325	0.40	1.19	0.23	0.43	0.12
ANKCP55	026715229147	5.10	1.13	1.10	1.13	1.40
ANKD	026715234318	7.65	1.52	1.35	0.57	1.17
ANKWCPST1	026715269907	7.50	1.71	1.27	0.92	1.99
ATKD30BLS	026715255726	0.95	2.54	0.35	0.31	0.28
ATKD30SB	026715234332	0.95	2.58	0.33	0.30	0.26
ATKD36BLS	026715255733	1.10	3.04	0.35	0.31	0.33
ATKD36SB	026715234349	1.10	3.04	0.33	0.30	0.30
ATKD48SB	026715234356	1.55	4.25	0.28	0.28	0.33
ATSKD30	026715241804	1.90	2.38	0.35	0.35	0.30
ATSKD36	026715241811	2.50	3.02	0.44	0.44	0.58
ATSKD48	026715241828	3.40	4.04	0.44	0.44	0.77
ATTD1	026715234370	0.45	0.37	0.37	0.56	0.08
ATTD1BLS	026715255740	0.55	0.37	0.37	0.55	0.07
ATTD2	026715273010	0.45	0.37	0.37	0.56	0.08
ATTD2BLS	026715273027	0.55	0.37	0.37	0.55	0.07
AVDKD10	026715234592	3.80	2.10	1.08	1.06	2.42
AVDKD219	026715234387	1.05	2.58	0.33	0.30	0.26
AVDKD8	026715234394	3.50	2.10	1.08	1.06	2.42
AVDKD8810	026715241903	3.80	1.36	1.34	1.33	2.43
CC65I28SB	026715259465	36.00	2.75	1.19	1.75	5.71
CP34I309SB	026715190157	44.20	3.33	1.13	2.25	8.44
CP34I369SB	026715190164	47.80	3.33	1.13	2.25	8.44
CP34I429SB	026715190171	57.20	4.31	1.15	2.25	11.12

Model	UPC Code	Weight	Length	Width	Height	Cube
CP35I309SB	026715186495	44.30	3.30	1.15	2.20	8.35
CP35I369SB	026715186501	48.00	3.33	1.15	2.25	8.59
CP35I429SB	026715186518	56.10	4.29	1.15	2.25	11.10
CP37I482SB	026715186525	63.00	4.33	1.13	2.25	10.97
CP55IQ369SB	026715228218	51.00	3.29	1.15	2.25	8.52
CP55IQ429SB	026715228225	55.00	4.31	1.15	2.25	11.12
CP57E362SB	026715228294	43.00	3.33	1.13	2.25	8.44
CP57E482SB	026715228300	55.00	4.31	1.15	2.25	11.12
CP57E602SB	026715228317	66.00	6.50	2.00	2.79	36.29
CP57IQT369SB	026715228232	59.00	3.33	1.15	2.25	8.59
CP57IQT482SB	026715228256	73.00	4.31	1.15	2.25	11.12
CP57IQT489SB	026715228249	73.00	4.31	1.15	2.25	11.12
CP57IQT542SB	026715228263	80.00	6.50	2.00	2.79	36.29
CP57IQT602SB	026715228270	83.00	6.50	2.00	2.79	36.29
CP57IQT662SB	026715228287	86.00	6.50	2.00	2.79	36.29
CPD9M363SB	026715258475	85.00	4.50	2.00	3.08	27.75
CPD9M483SB	026715258512	96.50	4.50	2.00	3.08	27.75
D49M30BLS	026715255702	62.00	2.88	2.75	0.74	5.83
D49M30SB	026715234202	67.00	2.88	2.75	0.74	5.83
D49M36BLS	026715255719	70.00	3.25	2.88	0.75	7.01
D49M36SB	026715234219	70.00	3.25	2.88	0.75	7.01
D49M48SB	026715234226	107.00	4.46	3.00	0.81	10.81
EB15	026715139446	46.00	3.00	1.21	2.19	7.94
EB9	026715106547	35.00	2.61	0.82	2.33	4.95
HADTBN24	026715268238	3.01	3.00	0.42	0.42	0.52
HADTBN30	026715268245	3.55	3.00	0.42	0.42	0.52

Model	UPC Code	Weight	Length	Width	Height	Cube
HARKBN24	026715268092	6.25	1.67	1.17	1.00	1.94
HARKBN30	026715268078	6.25	1.67	1.17	1.00	1.94
HAWRK5	026715268115	0.50	0.48	0.45	0.20	0.04
HAWTBN36	026715270811	1.40	1.17	0.33	0.33	0.13
HBC143ESS	026715269389	95.00	2.58	3.83	1.33	13.20
HBC143EWH	026715269396	95.00	2.58	3.83	1.33	13.20
HBC163ESS	026715269402	120.00	2.58	5.50	1.33	18.94
HBN1246SS	026715267828	25.50	1.23	1.25	1.14	1.75
HBN1306SS	026715267835	26.60	2.73	1.25	1.14	3.89
HCK44	026715146031	4.90	1.98	0.65	0.83	1.07
ICB3I36SBB	026715259380	90.00	2.00	3.50	2.83	19.83
ICB3I36SBS	026715259397	90.00	2.00	3.50	2.83	19.83
ILB11	026715169283	69.50	2.17	1.83	2.67	10.59
ILB6	026715169269	47.60	2.12	1.38	2.44	7.11
ILB9	026715169276	70.00	2.17	1.83	2.67	10.59
iQ12	026715229604	31.00	2.35	1.29	1.27	3.86
iQ6	026715229598	20.00	2.35	1.29	1.27	3.86
MD10TU	026715211029	6.95	0.90	0.90	1.32	1.07
MD6T	026715192038	4.30	0.87	0.54	0.79	0.37
MD6TU	026715203789	4.70	0.87	0.54	0.79	0.37
MD8S	026715204199	4.10	0.88	0.71	0.93	0.58
MD8T	026715192045	5.30	0.88	0.71	0.93	0.58
MD8TU	026715203796	5.60	0.88	0.71	0.95	0.59
P12	026715106523	27.30	2.05	0.99	1.27	2.58
P12NA	026715258529	20.40	1.63	0.94	1.02	1.56
P5	026715124343	17.60	2.33	1.33	0.50	1.56
P8	026715124350	25.90	2.33	1.33	0.42	1.30
PF6	026715234288	21.60	1.33	1.20	1.21	1.92

Model	UPC Code	Weight	Length	Width	Height	Cube
PK2230	026715209002	48.65	2.75	1.76	1.17	5.64
PK2239	026715209019	56.00	3.50	1.75	1.17	7.15
PK2245	026715209026	62.00	4.04	1.75	1.17	8.25
PKEX2239	026715209033	39.00	3.50	1.79	1.17	7.32
PKEX2245	026715209040	43.00	4.04	1.75	1.20	8.49
PM12	026715269563	27.00	2.06	0.96	1.29	2.55
PM6	026715269556	18.00	2.06	0.96	1.29	2.55
UCB3I30SBB	026715259328	36.00	3.03	2.08	0.66	4.14
UCB3I30SBS	026715259489	36.00	3.03	2.08	0.66	4.14
UCB3I30SBW	026715259342	36.00	3.03	2.08	0.66	4.14
UP26M30SB	026715229376	30.00	3.33	1.13	2.25	8.44
UP26M36SB	026715229383	33.65	3.29	1.15	2.25	8.49
UP26M42SB	026715229390	40.20	4.31	1.15	2.25	11.12
UP26M48SB	026715229406	43.05	4.31	1.15	2.25	11.12
WCB3I30SBB	026715259243	56.00	2.00	3.50	2.83	19.83
WCB3I30SBS	026715259250	56.00	2.00	3.50	2.83	19.83
WCB3I36SBB	026715259281	59.00	2.00	3.50	2.83	19.83
WCB3I36SBS	026715259298	59.00	2.00	3.50	2.83	19.83
WCP1306SS	026715269853	53.00	2.83	1.83	2.50	12.99
WCP1366SS	026715269860	57.00	3.33	1.83	2.50	15.28
WCS1306BLS	026715269914	53.00	2.83	1.83	2.50	12.99
WCS1306SS	026715269839	53.00	2.83	1.83	2.50	12.99
WCS1366SS	026715269846	57.00	3.33	1.83	2.50	15.28
WCT1306SS	026715269877	53.00	2.83	1.83	2.50	12.99
WCT1366SS	026715269884	57.00	3.33	1.83	2.50	15.28

Model	UPC Code	Weight	Length	Width	Height	Cube
WP28M30SB	026715229314	60.20	3.50	2.00	2.79	19.54
WP28M36SB	026715229321	65.50	3.50	2.00	2.79	19.54
WP28M42SB	026715229338	76.25	4.52	2.00	2.79	25.24
WP28M48SB	026715229345	80.00	4.50	2.00	2.79	25.13
WP28M54SB	026715229352	97.40	6.50	2.00	2.79	36.29
WP28M60SB	026715229369	103.70	6.50	2.00	2.79	36.29
WPD39M36SB	026715206605	90.00	3.50	2.00	3.08	21.58
WPD39M48SB	026715206612	108.00	4.50	2.00	3.08	27.75
WPD39M60SB	026715206629	136.00	6.50	2.00	3.08	40.08
WPP13612SS	026715270538	87.00	3.38	1.96	2.33	15.42
WPP1366SS	026715270521	82.00	3.38	1.96	2.33	15.42
WPP14812SS	026715270545	104.00	4.38	1.96	2.33	19.99
WTD9M36SB	026715258468	76.00	3.50	2.00	3.08	21.58
WTD9M48SB	026715258505	92.50	4.50	2.00	3.08	27.75





best®

BestRangeHoods.com

926 W. State Street, Hartford, WI 53027, USA

800-637-1453



BEST reserves the right to change specifications at any time without notice.