



Introducing ENERGY STAR® Qualified Models of John Wood® Power Vent™

The John Wood® Power Vent™ water heater is designed with an ultra quiet blower and state-of-the-art gas control with advanced self-diagnostics for quick and easy servicing. Our ENERGY STAR® qualified models are perfect for both residential new home construction and replacement water heater applications; the John Wood® Power Vent™ provides the ideal solution for your hot water needs.



ENERGY STAR® QUALIFIED MODELS

- Same foot print as existing heaters making them perfect for replacement
- Turbulator™ dip tube for self-cleaning, reducing sediment at the bottom of the tank and increasing hot water output by as much as 8%
- Over 20% more foam insulation and higher EF for energy and cost savings
- Relocated T&P and drain valve for ease of installation and serviceability

HIGH QUALITY FEATURES

Safety Features

- Flammable vapour sensor detects the presence of flammable vapours and automatically disables the unit preventing their ignition
- The only flammable vapour sensor in the industry that is protected from contaminants
- Robust air intake snorkel inhibits flammable vapours from entering the sealed combustion chamber

Serviceability

- State-of-the-art modular gas control features advanced self-diagnostic capability that makes troubleshooting easy

Industry Leading, Ultra Quiet Blower

- Quietest power vent water heater on the market

Water Heater Features

- Compact design – ideal as a replacement water heater and for closet installations
- Exclusive patented TankSaver® design to prolong tank life
- Convenient 3/4" side taps for combination applications on G5065S and G5065L

The Ultimate in Venting Flexibility

- All units can be vented horizontally through the wall or vertically through the roof with plastic venting pipe certified for gas-fired appliances

Meets the ANSI Z21.10.1/CSA4.1 flammable vapour ignition resistance (FVIR) standard.





An advanced line of power vented water heaters.

CAPACITY & DIMENSIONS

Model	Capacity USG (Litres)	Input BTU / hr	Recovery @100°F/55°C Rise USG (Litres)	Energy Factor ES	Height to Top of Blower A in. (cm)	Height to Top of Tank B in. (cm)	Diameter C in. (cm)	Overall Depth D in. (cm)	Shipping Weight lb. (kg)
NATURAL GAS - 8 and 2 year warranty									
JW40NVH-ES	40 (151)	33,000	30 (112)	0.64	58 (147)	48.5 (123)	21.13 (54)	26 (66)	155 (70)
JW50NVH-ES	50 (189)	38,000	34 (129)	0.62	60.5 (154)	51 (129.5)	22.63 (57)	27.25 (69)	187 (85)
JW5065SNV-ES*	50 (189)	65,000	59 (223)	0.62	60.75 (154)	51.25 (130)	22.63 (57)	27.25 (69)	200 (90)
JW5065LNV-ES*	50 (189)	65,000	56 (212)	0.62	60.75 (154)	51.25 (130)	22.63 (57)	27.25 (69)	200 (90)
JW60NVH-ES	60 (227)	38,000	34 (129)	0.62	70.5 (173)	59.5 (151)	22.5 (57)	2-3 (5-7.6)	190 (86)
LIQUID PROPANE - 6 and 1 year warranty									
6G40PVH-ES	40 (151)	33,000	30 (112)	0.64	58 (147)	48.5 (123)	21.13 (54)	26 (66)	155 (70)
6G50PVH-ES	50 (189)	38,000	34 (129)	0.62	60.5 (154)	51 (129.5)	22.63 (57)	27.25 (69)	187 (85)
6G5065SPV-ES	50 (189)	65,000	59 (223)	0.62	60.75 (154)	51.25 (130)	22.63 (57)	27.25 (69)	200 (90)
6G60PVH-ES	60 (227)	38,000	34 (129)	0.62	70.5 (173)	59.5 (151)	22.5 (57)	2-3 (5-7.6)	194 (88)

All high altitude (0-4,500 ft.) models are de-rated by 10% as per CSA.

* Side taps.

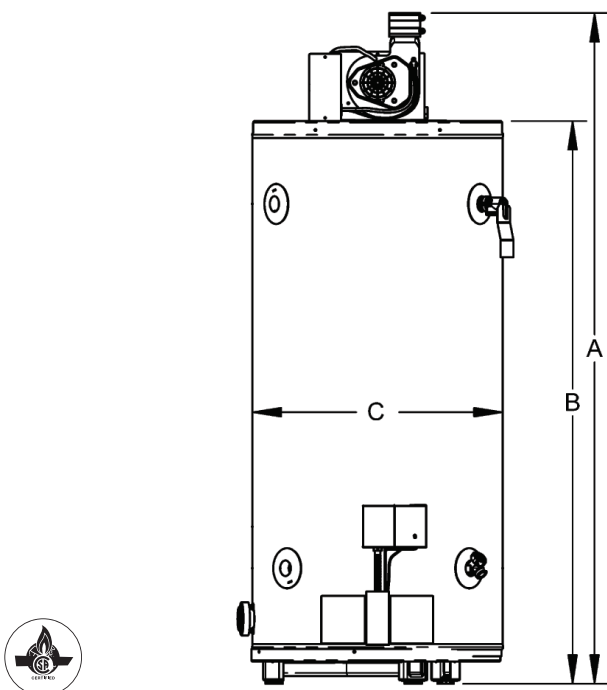

For more information, visit our website at:
www.johnwoodwaterheaters.com

GSW Water Heating

599 Hill Street West, Fergus, Ontario, Canada N1M 2X1

Sales/Customer Service: 1-888-599-2837

Fax: 1-519-787-5500

Technical Support and Warranty: 1-888-479-8324

E-mail: info@gswh-wh.com

GSW Warranty:

All GSW and John Wood® Water Heaters will be replaced free of charge in the case of tank leakage within the stated warranty period from the date of installation in domestic applications, and one year in commercial applications. All parts supplied are warranted for one year. Warranty does not include labour. Consult owner's manual for complete details.