

Demo Modes

Life's Good.

Table of Contents

Laundry Demo Modes

[Digital Dial Front Load Washer Demo Modes](#)

[Digital Dial Front Load Dryer Demo Modes](#)

[Front Load Washer Demo 6 Motion and Display](#)

[Front Load Washer Demo Spin Speed](#)

[Washer & Dryer Demo Smart Diagnosis](#)

[100 &200 Series Washtower Demo 6 Motion](#)

[100 &200 Series Washtower Demo Display](#)

[100 &200 Series Washtower Demo Smart Pairing](#)

[300 Series Washtower Demo Modes](#)

[Styler Demo Modes](#)

Refrigerator Demo Modes

[Refrigerator Demo Modes Dispenser Control Models](#)

[Refrigerator Demo Modes Non-Dispense Models](#)

[Refrigerator Demo Modes Interior Wall Control Models](#)

[Demo Mode Studio InstaView \(SRFVC2416S | SRFVC2406S\)](#)

[Refrigerator Demo Smart Diagnosis™](#)

Range Demo Modes

[Range Demo Mode Instaview™](#)

[Range Demo Mode Lock Out Demo](#)

[Range Demo Mode Smart Diagnosis™](#)

Laundry Demo Modes



Life's Good.



Digital Dial Front Load Washer Demo Mode

1. Plug the washer to a power supply.
2. Press the **Power** button of the washer.
3. Press the two option buttons (**Temp. + Delay Start**) at once.
(within 1 sec after pushing power key)
→ It shows 'Demo Mode List' on the LCD screen.
4. Turn the dial knob to choose a demo mode.
 - 1) Display Mode
 - 2) AI Wash
 - 3) 6 Motion
 - 4) TurboWash
5. Press the **Start** button to start the demonstration.

*Ensure that shipping bolts are removed prior to demo

TurboWash

This feature allows you to drastically reduce cycle time and energy all without sacrificing performance.

6 Motion

Use this demo to highlight LG's industry leading wash performance via our exclusive 6Motion™ technology.


Display Demo

This mode will light up the display and go through cycles & options, while providing cycle descriptions.

AI Wash

Shows how AI Wash provides the most advanced cleaning. Detects load size, fabric type, soil level and optimization.

[FX LCD Washers] Demo Mode List

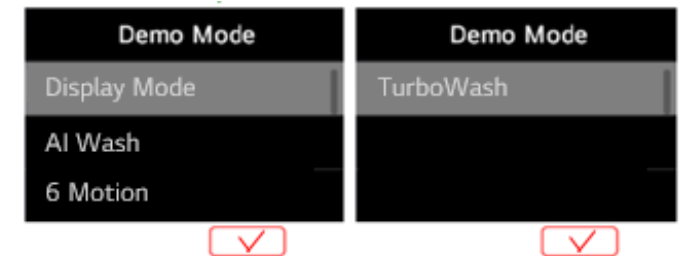

Digital Dial Front Load Dryer Demo Mode

1. Plug the dryer to a power supply.
2. Press the **Power** button of the dryer.
3. Press the two option buttons (**Temp. + Energy Saver**) at once.
(within 1 sec after pushing power key)
→ It shows 'Demo Mode List' on the LCD screen.
4. Turn the dial knob to choose a demo mode.
 - 1) Display Mode
 - 2) AI Dry
5. Press the **Start** button to start the demonstration.

AI Dry


Shows how AI Dry provides the most efficient drying by optimizing the cycle based on fabrics

Display Demo

This mode will light up the display and go through cycles & options, while providing cycle descriptions.



[FX LCD Dryers] Demo Mode List

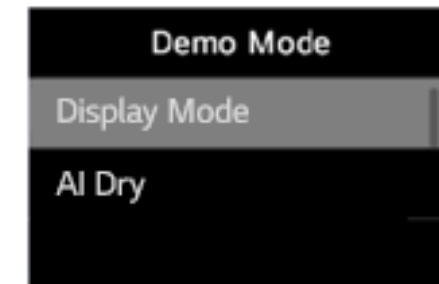



Front Load Washer Demo 6 Motion & Display



d01(27") / d03 (29")

6 Motion Demo Mode

Use this demo to highlight LG's industry leading wash performance via our exclusive 6Motion technology.

1. Press and hold **Temp & Delay Wash**
2. Press **Power** (d01 will appear on the display)
3. Use the Delay Wash button to toggle between demo modes
4. When on the desired demo mode press **Play**

***Ensure that shipping bolts are removed prior to demo**

The order of the six motions during demo mode ;



d04 (not avail on 29")

Display Demo

When activated the lights will flash in a set pattern in order to draw customers attention on the salesfloor.





Front Load Washer Demo Spin Speed



Spin Demo

This demo shows the power of the Inverter Direct Drive Motor. It also demonstrates how quiet and stable LG washers are while reaching these extremely fast

1. Press and hold the **Spin & Soil** buttons
2. Press **Power** (all display lights will turn on)
3. Press **Play** to activate spin mode
4. Press **Play** again to show 50RPM (50 appears in display)
5. Press **Play** again to show 600RPM (60 appears in display)
6. Press **Play** again to show 1150RPM (115 appears in display)

***Ensure that shipping bolts are removed prior to demo**

***Note – LG 27" Washers can actually reach up to 1300 RPMS during a cycle**



Smart Diagnosis™ Demo

Use this Demo to highlight the amazing technological advantage LG provides their customers. This feature allows our machines to tell our service center what the issue is and what parts need to be ordered. Via LG's ThinQ app, help is only a click away. Now problems can be diagnosed without ever needing to call an LG representative. The application will record and analyze the signal sent from the appliance and can instantly provide troubleshooting steps to help resolve the problem.



1. Plug in the machine and Press **Power**
2. Press and hold the **Temp** button for 5 seconds
3. The Smart Diagnosis™ signal will then activate while the display counts down from 6 seconds



d1

6 Motion Demo Mode

This demo highlights LG's industry leading wash performance via our exclusive 6 Motion technology.

*Note – this demo works best when placing a couple of items inside the drum to enhance the visual effect of



The order of the six motions during demo mode ;



Tumble



Stepping



Scrub



Rolling



Swing



Filtration



1. Plug the Washer into a standard 110V power supply
2. Press and hold the **Soil** & **Pre-wash** buttons
3. Press Power, **d1** should appear in the display
4. Press play

*Ensure that shipping bolts are removed prior to demo



d4

Display Demo

When activated the lights will flash in a set pattern to draw customers attention on the salesfloor.

The Washer and Dryer each have their own display demo. If a dryer cheater cord is not available, the washer demo can still be activated on its own.

1. Plug the Dryer in using a 220V cheater cord
2. Press and hold the **Time Dry & Wrinkle Care** buttons
3. Press Power
4. Press play (**SEE** will appear in the display once activated)



1. Plug the Washer into a standard 110V power supply
2. Press and hold the **Soil & Pre-wash** buttons
3. Press Power, **d1** should appear in the display
4. Press Steam & TurboWash Buttons together until **d4** appears
5. Press play (**SEE** will appear in the display once activated)

d8

Smart Pairing Demo

This demo shows the WashTower's ability to communicate cycle data from the washer to the dryer

The Washer and Dryer each have their own display demo. If a dryer cheater cord is not available, the washer demo can still be activated on its own.







1. Plug the Washer into a 110V outlet + plug in the Dryer using a 220V cheater cord
2. On the Washer press and hold the **Soil & Pre-wash** buttons
3. Power on the washer, **d1** should appear in the display
4. Press **Steam & TurboWash** Buttons together until **d8** appears
5. Press play (**Bedding** cycle is selected and starts a countdown)
6. Press Power on the Dryer (**Bedding** cycle will automatically be selected)

← Back

300 Series WashTower

1. Plug the washer to a power supply. (Do not plug the dryer for Demo modes)
2. Touch the **Power** button of the washer.
3. Touch the upper left corner of the LCD screen 10 times in succession.
→ It shows 'Hidden Mode List' on the LCD screen.
4. Touch the 'Demo Mode' on the screen.
5. Touch a demo mode you want.
 - 1) Display Mode
 - 2) 6 Motion
 - 4) TurboWash
6. Touch the **Start/Pause** button to start the demonstration.
7. Touch the **Start/Pause** button to stop the demonstration and move to another mode.

*Ensure that shipping bolts are removed prior to demo

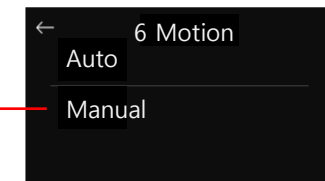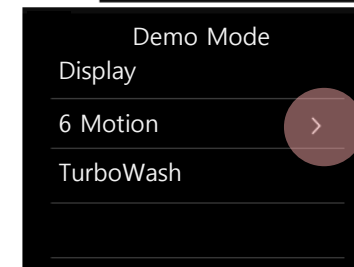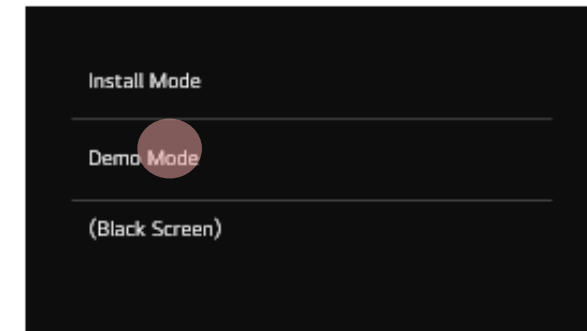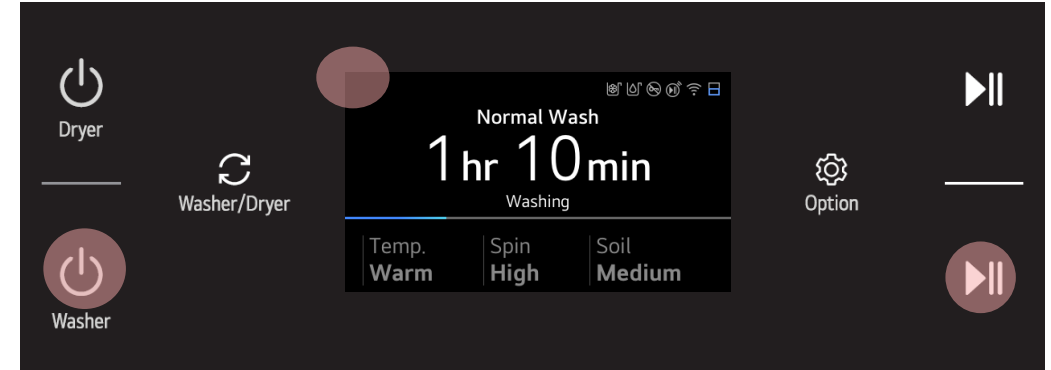

Touch the 'Options' button on the panel to move on to the next motion.



Display Demo

This mode will light up the display and go through cycles & options, while providing cycle descriptions.


6 Motion

Use this demo to highlight LG's industry leading wash performance via our exclusive 6Motion™ technology.

TurboWash

This feature allows you to drastically reduce cycle time and energy all without sacrificing performance.

Styler Demo Modes

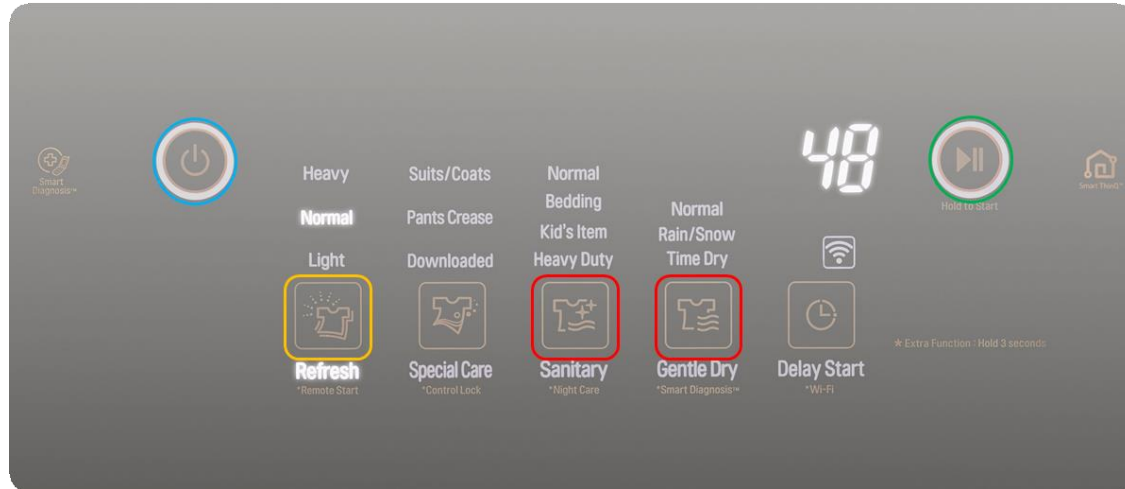

1. Press and hold **Dry & Sanitary**
 2. Press **Power** (dE0 will appear on the display)
 3. Use the **Refresh** button to toggle between modes
 4. When on the desired demo mode press **Play**
- * For a Live Steam Demo, add water to Fill Tank inside

dE0

Moving Hanger & Steam

This demo highlights the moving hanger system. You can also add steam to the visual by selecting the Gentle Dry button.

dE2

9 Minute Refresh

This will allow you to demo the refresh cycle in 9 minutes. The LED's will remain on for the entire demo.

dE1

9 Minute Refresh

This will allow you to demo the refresh cycle in 9 minutes. The LED's will remain on for about 3-4 mins.

dE3

Moving Hanger

This demo highlights the moving hanger system alone

*Note – Leave the door open after performing a steam demo to let the Styler dry out



Refrigerator Demo Modes



Life's Good.




1. Plug in the refrigerator
2. Open the right-side fridge door
- 3a. Press and hold both the **Refrigerator** & **Ice Plus** buttons for 5 seconds
- 3b. or - Press and hold the **Refrigerator** button while pushing **Ice Plus** 3 times
4. When demo mode has been activated, **OF F** will be displayed
5. Repeat process to deactivate Demo Mode





1. Plug in the refrigerator
2. Open the fridge door(s)
- 3a. Press and hold both the **Refrigerator** & **Ice Plus** buttons for 5 seconds
- 3b. or - Press and hold the **Refrigerator** button while pushing **Ice Plus** 3 times
4. When demo mode has been activated, **OF F** will be displayed
5. Repeat process to deactivate Demo Mode



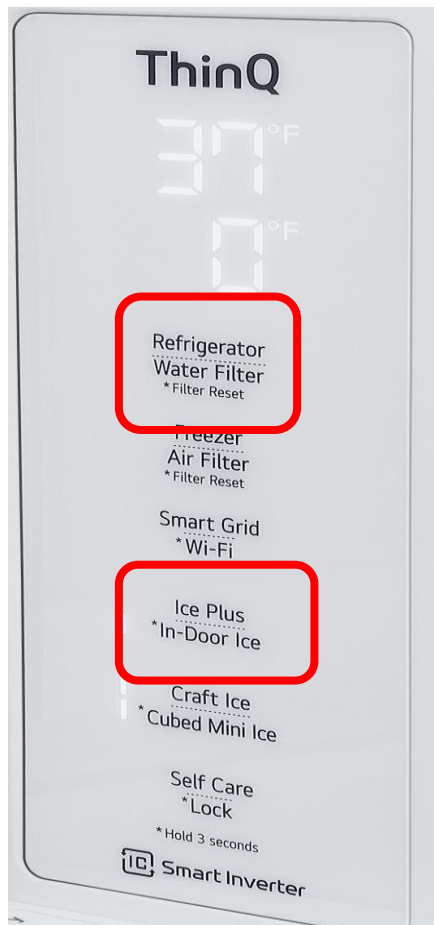

1. Plug in the refrigerator
2. Open the fridge door(s)
3. Press and hold the **Refrigerator** button while pushing **Ice Plus** 3 times
4. When demo mode has been activated, **OF F** will be displayed
5. Repeat process to deactivate Demo Mode



1. Plug in the refrigerator
2. Open the fridge doors
3. Press and hold the **Refrigerator** button while pushing ***Wi-Fi** 3 times
4. When demo mode has been activated, **OF F** will be displayed
5. Repeat process to deactivate Demo Mode



Smart Diagnosis™ Demo

Use this Demo to highlight the amazing technological advantage LG provides their customers. This feature allows our machines to tell what the issue is and what parts need to be ordered. Via LG's ThinQ app, help is only a click away. Now problems can be diagnosed without ever needing to call an LG representative. The application will record and analyze the signal sent from the appliance and can instantly provide troubleshooting steps to help resolve the problem

Dispensed Models



1. Open the right-side fridge door
2. Point out the Smart Diagnosis™ logo and hold your phone up to it
3. On the dispenser display hold the **Lock** button
4. Press and hold the **Freezer** button for 5 seconds
5. The Smart Diagnosis™ signal will then activate while the display counts down from 3 seconds. This shows how any phone can pick up the signal from our Smart Diagnosis™ equipped appliances.

Non-Dispensed Models



1. Open the fridge doors
2. Point out the Smart Diagnosis™ logo and hold your phone up to it
3. Press and hold the **Freezer** button for 5 seconds
4. The Smart Diagnosis™ signal will then activate while the display counts down from 3 seconds. This shows how any phone can pick up the signal from our Smart Diagnosis™ equipped appliances.



Range Demos



Life's Good.

InstaView™ Demo

Keep the heat inside with InstaView™. With two quick knocks on the oven door, you can view your food while cooking to check the progress without letting the heat out. With regards to Free-Standing Ranges, this also keeps you from having to reach over a hot cooktop – increasing overall safety.

1a. Plug in a Gas InstaView Range to a standard 110V outlet

1b. Plug in an Electric InstaView Range using a 220V cheater cord

2. After the Range has been plugged in for 60 seconds you can then knock twice on the oven door to highlight LG's InstaView™ feature



Back

Range Demo Mode Lock Out Demo

Lock Out Demo

LG Slide-in Electric Ranges can completely lock out all controls. This takes away the safety concern customers often have when deciding to buy a front control range and delivers peace of mind



1. Plug in an Electric Slide-in Range using a 220V cheater cord
2. Hold the ***Control Lock** button for 5 seconds
3. Show the customer the door locks and none of the cooktop elements or oven controls will activate. This ensures complete safety and peace of mind



Smart Diagnosis™ Demo

Use this Demo to highlight the amazing technological advantage LG provides their customers. This feature allows our machines to tell our service center what the issue is and what parts need to be ordered. Via LG's ThinQ app, help is only a click away. Now problems can be diagnosed without ever needing to call an LG representative. The application will record and analyze the signal sent from the appliance and can instantly provide troubleshooting steps to help resolve the problem

- 1a. Plug in a Gas Range to a standard 110V outlet
- 1b. Plug in an Electric Range using a 220V cheater cord
2. Press and hold the **Start** button for 5 seconds
3. The Smart Diagnosis™ signal will then activate while the display counts down from 5 seconds. This shows how any phone can pick up the signal from our Smart Diagnosis™ equipped appliances.



Back