



HOUSE OF ROHL

At the heart of every shower system is the valve and the inspiration behind each of our valves is our quest to provide an unparalleled experience through ease of installation and optimal functionality.

1/2" Pressure Balance Valve – Basic Shower

- Provides both volume and temperature control in one handle
- Supports trims across Perrin & Rowe®, ROHL® and Riobel® collections

1/2" Thermostatic and Pressure Balance Valves – Simple Spa

- No additional diverters or volume control/shut off valves needed
- Runs any 2 functions simultaneously or up to 3 functions independently
- Separate handle for a “set it and forget it” temperature system
- Supports trims across Perrin & Rowe®, ROHL® and Riobel® collections

3/4" Thermostatic Valves – Dream Spa

- Delivers volumes from 10-20 GPM enabling you to transform any bathroom into a luxurious spa
- Supports any shower design, ranging from a streamlined 2-person shower system to more decadent configurations
- Supports complete experience customization with specific volume controls for all functions
- Separate handle for a “set it and forget it” temperature system

All valves are made from solid brass, include features to simplify installation by the plumber and are supported by a limited lifetime warranty.



HOUSE OF ROHL

SHOWER CONFIGURATION GUIDE

For warranty or additional information, contact:

HOUSEOFROHL.COM
1-800-777-9762





RL070
HOUSE OF ROHL

1/2" Pressure Balance - Basic Shower - 1 Function

R51



- 5.8 GPM
- Temperature and volume control
- Extension kit available and sold separately
- Available inlet connections:
1/2" NPT, PEX (SPEX), Expansion Pex (EX)
- Bottom outlet compatible with diverter tub spout; not suitable for handshower
- Must purchase trim TXX51 separately

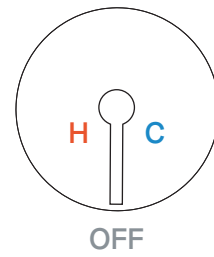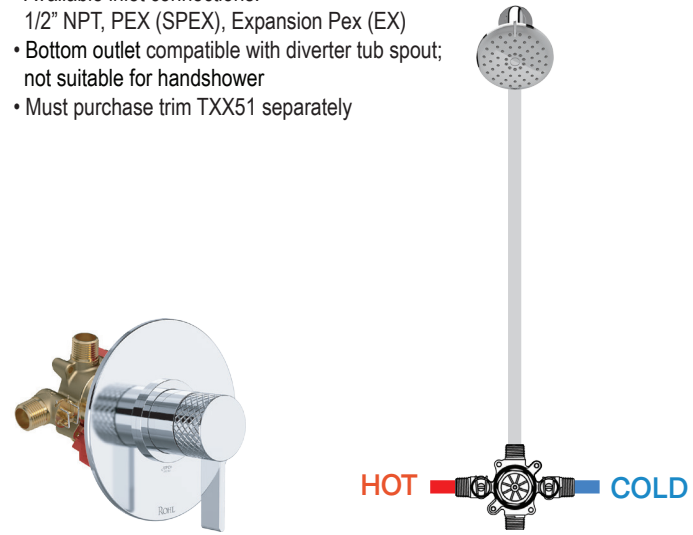

1/2" Thermostatic & Pressure Balance - Simple Spa - 3 Functions

R23



- 6.3 GPM
- 2 dedicated functions and 1 shared function
- Temperature and volume control with diverter
- Separate handle allows for "set it and forget it" temperature control
- Combines both thermostatic and pressure balance technologies
- Extension kit available and sold separately
- Available inlet connections:
1/2" NPT, PEX (SPEX), Expansion Pex (EX)
- Must purchase trim TXX23 separately

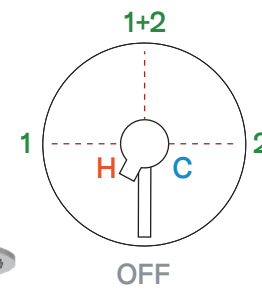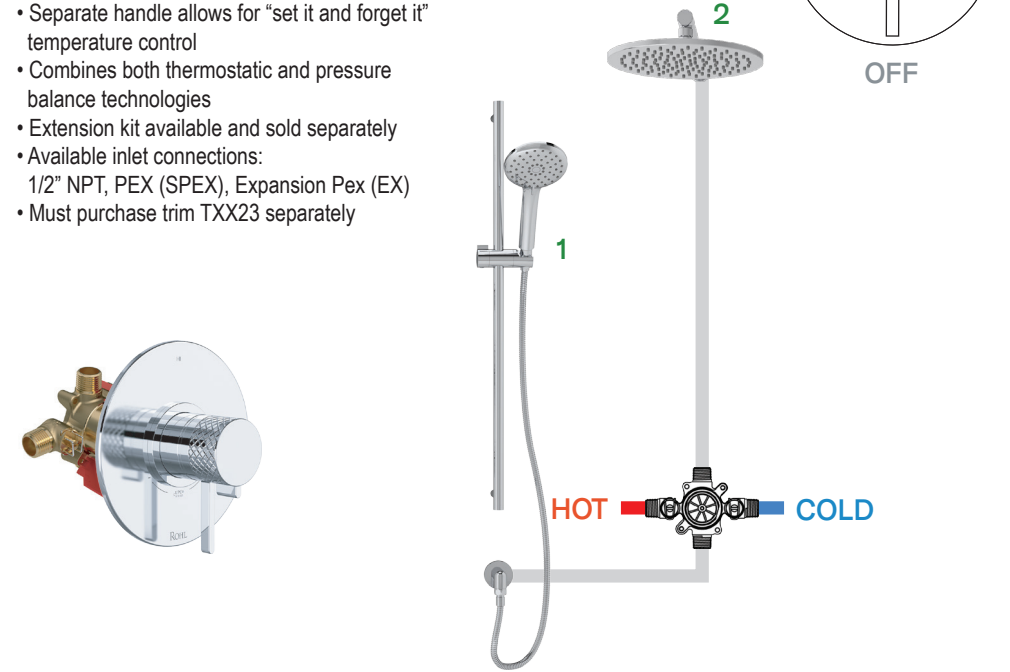

1/2" Thermostatic & Pressure Balance - Simple Spa - 5 Functions

R45



- 6.3 GPM
- 3 dedicated functions and 2 shared functions
- Temperature and volume control with diverter
- Separate handle allows for "set it and forget it" temperature control
- Combines both thermostatic and pressure balance technologies
- Extension kit available and sold separately
- Available inlet connections:
1/2" NPT, PEX (SPEX), Expansion Pex (EX)
- Must purchase trim TXX45 separately

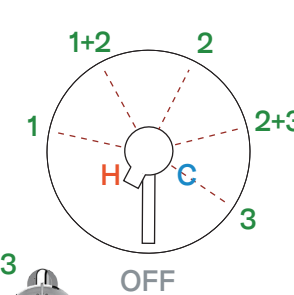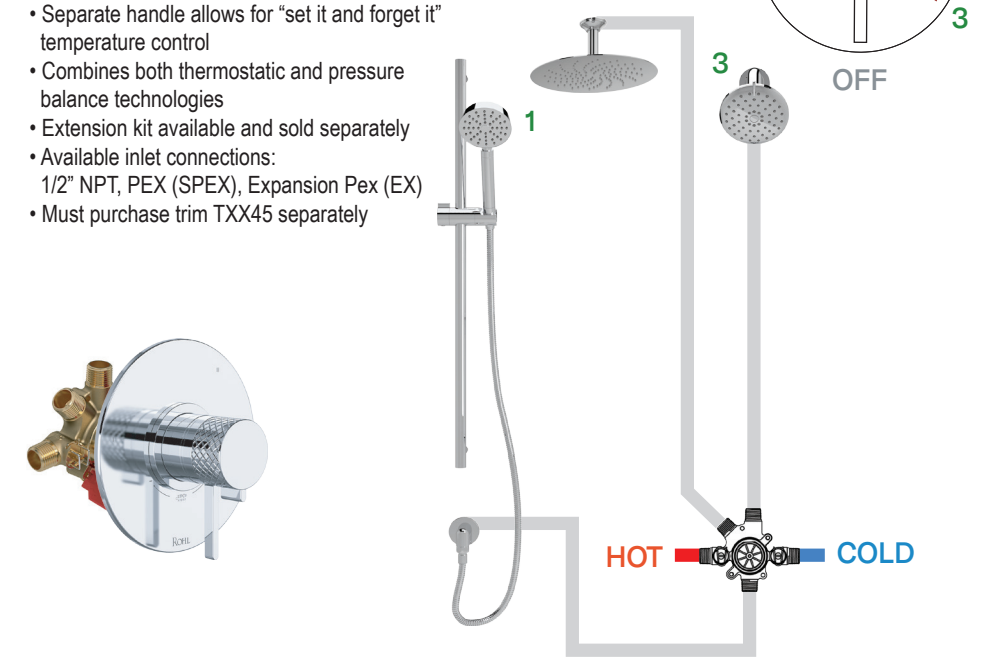

3/4" Thermostatic & Pressure Balance - Dream Spa - 6 Functions

R46


- 10 GPM
- 4 dedicated functions and 2 shared functions
- 2 temperature and 2 volume controls with diverters
- Separate handles allow for "set it and forget it" temperature control
- Combines both thermostatic and pressure balance technologies
- Available inlet connection: 3/4" NPT
- Must purchase trim TXX46 separately

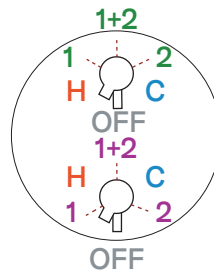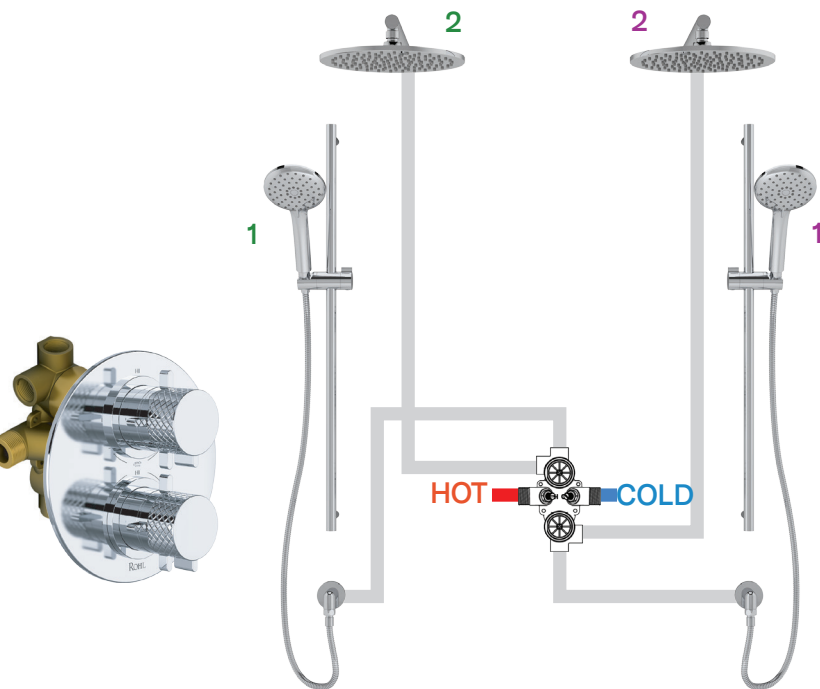



3/4" Thermostatic & Pressure Balance - Dream Spa - Multi-function

R83

- 20 GPM maximum output - See the diagram below for details
- 2 temperature and volume controls
- Separate handles allow for "set it and forget it" temperature control
- Optional volume controls support additional functionality
 - To use body sprays as configured below, the showerhead must be on
- Components grouped by color share a common temperature control
- Available inlet connection: 3/4" NPT
- Trim included with rough-in valve

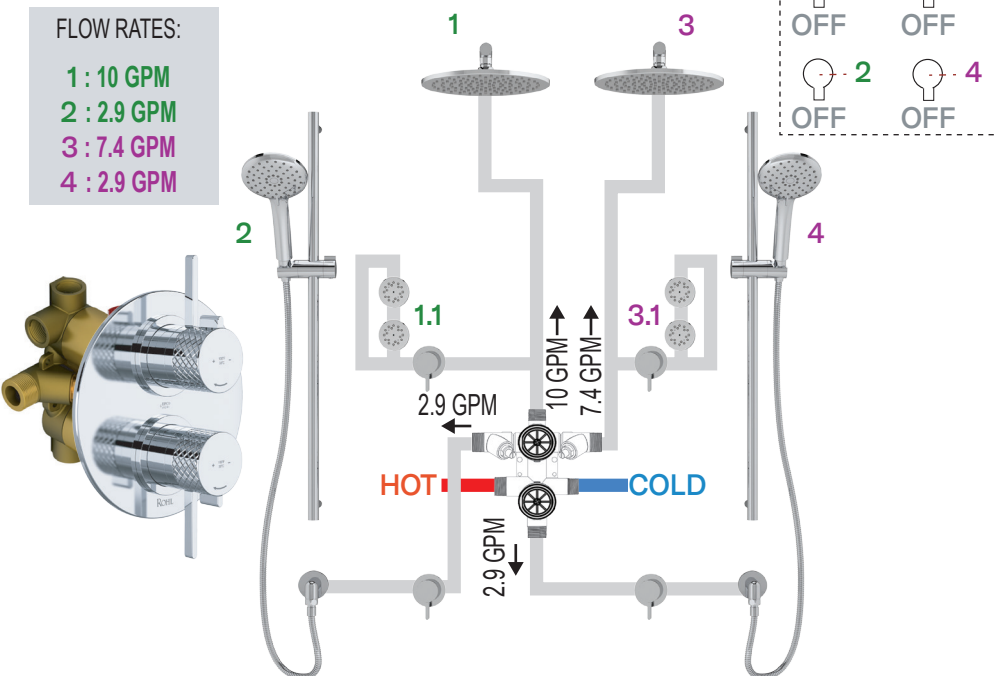

FLOW RATES:
 1 : 10 GPM
 2 : 2.9 GPM
 3 : 7.4 GPM
 4 : 2.9 GPM

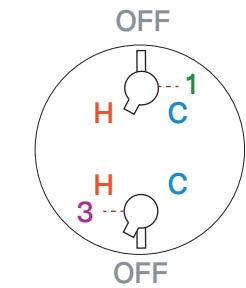

3/4" Thermostatic Rough Valve - Dream Spa - Multi-function

1005N

- 12 GPM
- "Set it and forget it" temperature control only
- Extension kit included with valve
- Must add R1040R volume controls, sold separately
- As configured below, every component may be used independently or shared
- For increased functionality, add additional volume controls
- Available inlet connection: 3/4" NPT
- Must purchase trim separately

